



## PRS-CSR Call Station Remote



- ▶ Connects to call station interface via CAT-5 cable
- ▶ Up to 1 km from Praesideo optical network
- ▶ Uses standard Praesideo keypads for extension
- ▶ Built-in limiter
- ▶ Powered via CAT-5 and/or local power supply
- ▶ Complete supervision
- ▶ IEC 60849 compliant

The PRS-CSR is a call station with the same functionality as the basic call station, LBB 4430/00, but it uses CAT-5 cable for its connection to the Praesideo network. It connects, one-to-one, to the call station interface, PRS-CSI, which is part of the Praesideo optical network. The CAT-5 cable, carrying digital audio and control data, can be as long as 1 km. The length of the CAT-5 cable is not a part of the Praesideo optical network length. This considerably increases the overall possible length of the optical network.

The PRS-CSR can be extended with up to 16 keypads (LBB 4432/00 or LBB 4434/00), each with eight programmable keys. Extension with a numeric keypad (PRS-CSNKP) is also possible.

### Functions

The call station has a cardioid, supervised microphone on a gooseneck stem with good speech intelligibility. A limiter and a speech filter improve intelligibility and prevent clipping of the audio. It has a volume control for the monitoring speaker and the headset. When it plays a chime or a pre-recorded message, the call station activates its speaker. When a headset is connected, it replaces the microphone and speaker.

The remote call station connects via a CAT-5 cable to an PRS-CSI unit, which interfaces it to the Praesideo optical network. The call station gets its power from the interface unit via the CAT-5 cable, but is also equipped with a local power supply connection for extreme cases with a very long cable and many keypads.

Up to 16 call station keypads can connect to the station via a serial communication link. The call station provides the power for the keypads. Up to 224 priorities can be assigned to the call station. All configuration can be done via the Praesideo network controller.

The remote call station is fully supervised and complies with IEC 60849. The call station supports fail-safe operation. Even if the Praesideo network controller fails, the call station is still able to put through emergency calls.

### Controls and indicators

- Three status LEDs
- Configurable PTT-key
- Volume control for loudspeaker/headset


### Interconnections

- RJ45 connector for CAT-5 connection
- Serial data and power supply interface for call station keypads
- Kycon type (lockable) connector for power and two control inputs
- 3.5 mm jack for headset/headphone

**Certifications and Approvals**

Region	Certification	
Europe	CE	TUV
	GL	GL
Safety	acc. to IEC 60065-98	
Immunity	acc. to EN 55103-2	
Emissions	acc. to EN 55103-1 / FCC-47 part 15B	
EVAC (TÜV certified)	acc. to IEC 60849 / BS 5839-8	

**Installation/Configuration Notes**

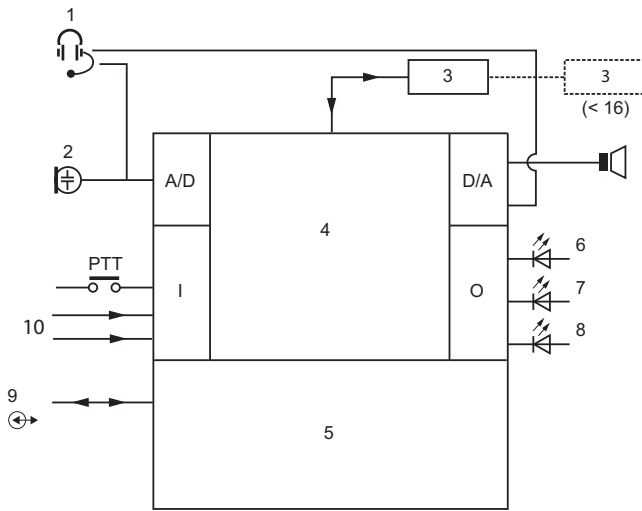

- 1 Headset
- 2 Microphone
- 3 Keypad(s)
- 4 Network processor and DSP
- 5 Network redundancy switching
- 6 Power/error
- 7 Call station status (two-color)
- 8 Network status
- 9 Data connection (CAT-5)
- 10 Control input

**Parts Included**

Quantity	Component
1	PRS-CSR Call Station Remote
1	Flat cable

**Technical Specifications**

**Electrical**

External power supply	18 to 56 VDC
Power consumption	2.9 W at 48 V without keypads

**Microphone**

Nominal acoustic input level	75 to 90 dB SPL
S/N	> 60 dB at 85 dB SPL
Frequency response	340 Hz to 14 kHz (-3 dB)

**Loudspeaker**

S/N	80 dB at max.
Sound pressure level	85 dB (SPL) at 0.5 m and 1 kHz

**Headset**

Connector	3.5 mm jack
Recommended type	Hosiden HBH 0058

**Control inputs**

Operation	Closing contact (with supervision)
-----------	------------------------------------

**Mechanical**

Dimensions (H x W x D)	90 x 160 x 200 mm (3.5 x 6.3 x 7.9 in)
Length of goose neck	380 mm (15 in)
Weight	1 kg (2.2 lb)
Mounting	Standalone
Color	Charcoal

**Environmental**

Operating temperature	-5 °C to +45 °C (+23 °F to +113 °F)
Storage temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Humidity	15% to 90%
Air pressure	600 to 1100 hPa

**Ordering Information**

PRS-CSR Call Station Remote	PRS-CSR
same functionality as the basic call station, LBB 4430/00, but it uses CAT-5 cable for its connection to the Praesideo network	

**Accessories**

PRS-CSI Call Station Interface	PRS-CSI
an interface between a single remote call station, PRS-CSR, or a remote call station kit, PRS-CSRK, and the fiber optical Praesideo network.	

LBB 4432/00 Call Station Keypad	LBB4432/00
has eight programmable buttons, each with a two-color status LED.	

LBB 4434/00 Call Station Keypad Kit	LBB4434/00
used in combination with a call station kit or call station basic to make manual or pre-recorded announcements to any assigned zones, or to execute pre-defined actions.	

**Ordering Information****PRR-CSNKP Numeric Keypad**

can be used for user access, zone and zone group selection. LCD for user feedback.

**PRR-CSNKP**

**Americas:**

Bosch Communications Systems  
12000 Portland Avenue South  
Burnsville, Minnesota, 55337, USA  
Phone: +1-800-392-3497  
Fax: +1-800-955-6831  
audiosupport@us.bosch.com  
www.boschcommunications.us

**Europe, Middle East, Africa:**

Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: +31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**

Bosch Security Systems Pte Ltd  
38C Jalan Pemimpin  
Singapore 577180  
Phone: +65 6319 3450  
Fax: +65 6319 3499  
apr.securitysystems@bosch.com  
www.boschsecurity.com

**Represented by**