


## MZU 2008

### ZONE PAGING UNIT



#### DESCRIPTION

- The system can be configured in one of the following ways:
- The two inputs of the unit are driven by two amplifiers, one of which is dedicated to voice transmission and the other to music transmission. The 8 outputs of the unit drive the 8 speakers of the 8 audio zones.
  - The two inputs of the unit are driven by two signal preamplifiers, one of which is dedicated to voice transmission and the other to music transmission. The 8 outputs of the unit drive the 8 power amplifiers dedicated to sound diffusion in the 8 audio zones.

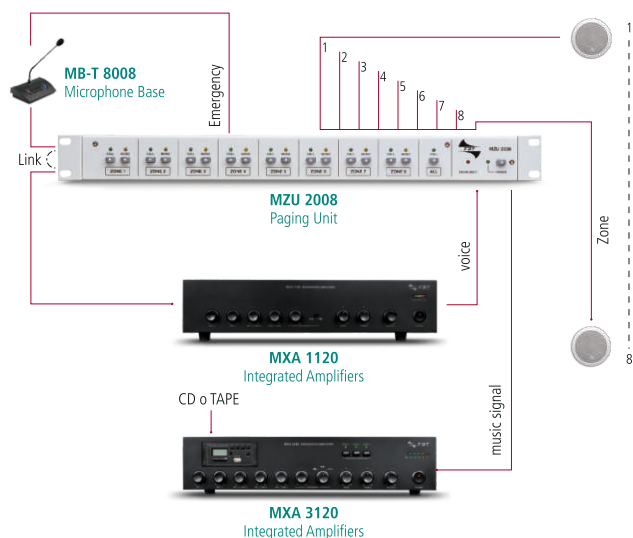

#### TECHNICAL DATA

CHARACTERISTIC	1 rack unit with frame RAL 7035 light grey paint finish
INPUTS	2 music inputs with two wires, speech with three wires, one of which is used for emergencies (for amplifiers)
OUTPUTS FOR LOUDSP. LINE (zones)	8 with three wires, one of which is used for emergencies
MAX. APPLICABLE POWER	1200W/100V, 840W/70V, 600W/50V, 300W/25V
CONTROLS	Speech key for each zone, music key for each zone, general call key, power on-off key
REMOTE CONTROLS	Zone selection control, general call command, activation of emergency and open collector output
OUTPUT POWER SUPPLY	+15 / 0 / -15 Vdc
LUMINOUS INDICATORS	Speech led and music led per zone, general call indicator led, emergency indicator led, power on-off indicator led
AC POWER SUPPLY	230Vac with external power supply unit / 120Vac with external power supply unit
OPTIONAL ACCESSORIES	MBT 8008 microphone base