



# LED INDICATION / LED INDIKERING

SAC-U32

## LED INDICATORS



LED indicator Green/Grön	Red/Röd	Status ENG / SE
		Main power supply / Nät drift
		Power failure - Emergency-light-operate / Strömvabrott - Nödljus
		Function test / Funktionstest
		Emergency duration test / Driftvaraktighetstest
		Emergency duration <2h / Driftvaraktighetstest <2h
		Illuminant - Charge over defekt / Ljuskälla - omkoppling defekt
		Battery - Charge defect / Batteri - Laddning defekt

## MANUAL TEST FUNCTION

TEST button Press _sec	LED Green/Grön	Status ENG / SE
		Main power supply/ Nät drift
		A short time emergency operation 5sec/ Kortvarig nöddrift 5sek
		Start function test emergency operation 30sec/ Funktionstest 30sek
		Start emergency duration test 3h/ Driftvarighetstest 3h
		Stop emergency duration test/ Driftvarighetstest avbryts

ENG

## Autotest

Once the unit is powered up it will automatically initiate a self test as follows:

**Every week :** Performs a 30 sec duration test  
**Every year :** Performs a 3h duration test

SE

## Autotest

Efter anslutning till nätpåslagan aktiveras självtestet enligt nedan:

**Vare vecka:** Utförs ett 30 sec långt test  
**Vare årl:** Utförs ett 3h test

Explanation/ Teckenförklaring			
Off Släck	On Lyser	Flashing Blinkar	Flashing 1/sec Blinkar 1/sec

SAC Nordic AB reserverar sig för eventuella fakta- eller tryckfel i denna trycksak. SAC2017-1




SAC Nordic AB • Prästtorpsvägen 16 • S-341 51 Lagan • SWEDEN • www.sacnordic.com

Safe Security Solutions

# MANUAL SAC-U32

SAC-U32 73 505 51



# SAC-U32

Dubbelsidig hänvisningsarmatur





# EMERGENCY LIGHT

SAC-U32 & SAC-U40

ENG


## EMERGENCY LIGHTING

**LED 32m / 40m**

SAC-U32 are a reference fixture with bright LED's and long life burn time. Low energy, low maintenance and long life combined with a auto-testing system and a modern reliable technology allows the fixture to a choice for simplicity, safety and future. Complies with EN 60598-2-22.

The SAC-U40 consists of a panel (Dimensions: 350 x 242 mm) and 4 pictograms in the most common designs. U40 is an upgrade kit for SAC-U32. The reading distance is 40 m.

- Pictograms (interchangeable) for the most common configurations (included)
- Can be installed on ceiling-, wall- and end-/flag-mouting (included)
- Supervised by a self-testing system
- House of aluminium and acrylic glass
- Battery backup (up to 3 hours emergency operation)
- Maintained or non-maintained
- Accessories: Pendant for ceiling (adjustable 1.5m), Shock protection, battery, pictogram.

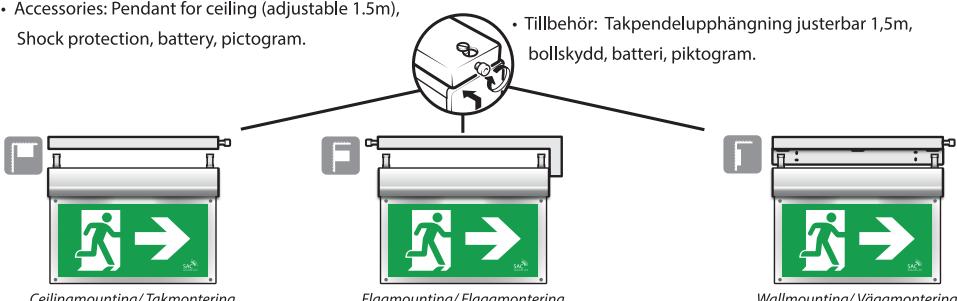

Art.no	E-no	Model	Light source	Viewing distance	Class	Battery backup	Battery	Weight
460401	73 505 50	SAC-U25	15 LED	25 m	IP40	NiMH 4,8V 0,8 Ah	3 h	1,0 kg
460402	73 505 51	SAC-U32	15 LED	32 m	IP40	NiMH 4,8V 0,8 Ah	3 h	1,3 kg
460424	73 416 15	SAC-U40	-	40 m	-	-	-	0,7 kg
460415	73 513 44	Pendant for ceiling / Takpendel						
460426	73 513 46	(U32) Disabled pictogram / Piktogram rullstol						
460412	73 513 50	Shock protection cover / Bollskydd						
460476	-	Battery pack / Batteripack						





Pictogram





Protection/Bollskydd

# INSTALLATION & LED / BATTERY REPLACEMENT



SAC-U32

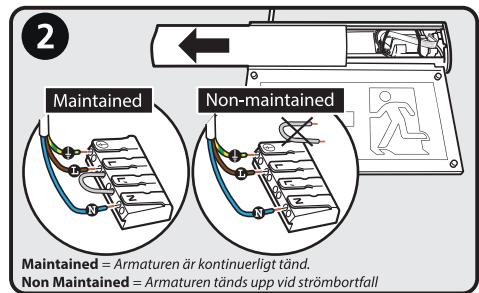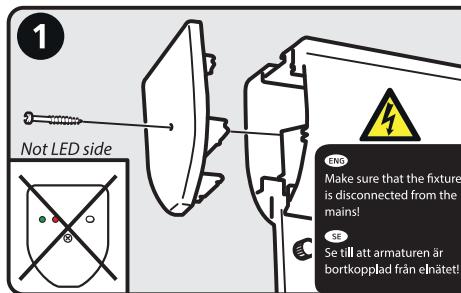

## BATTERY REPLACEMENT / BATTERIBYTE

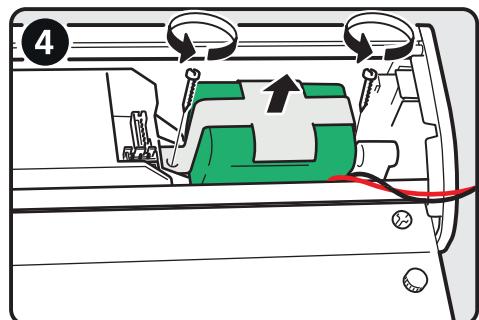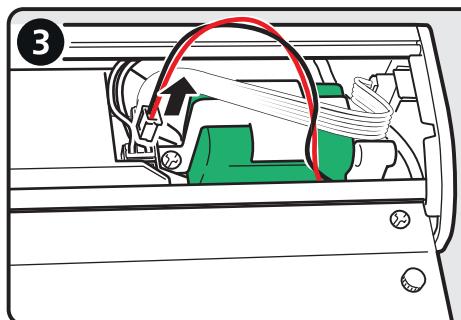

## LED-STRIP REPLACEMENT / LED-LIST BYTE

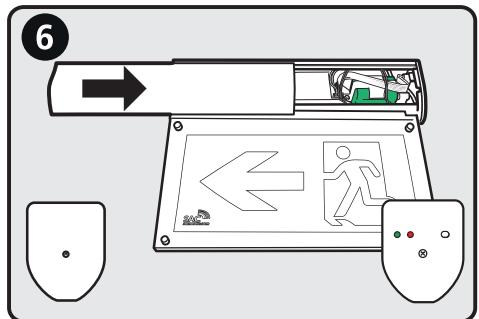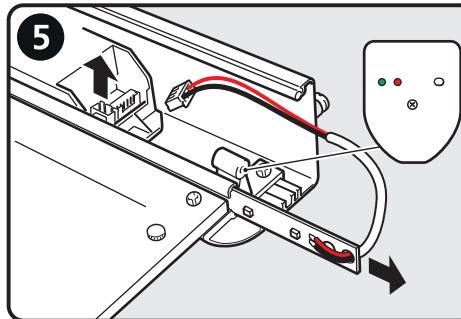

ENG

- Loosen the screw on the side. The side where the LEDs are not!
- Slide the cover to the side
- Unplug the battery (carefully!)
- Loosen the screws on the battery compartment and replace the battery.
- Carefully pull the LED bar from the slot.
- Follow the above steps in reverse order.

SE

- Lossa skruven på sidan. Den sidan där inte lysdioderna sitter!
- Skjut luckan åt sidan
- Dra ut kontakten till batteriet (försiktigt!)
- Lossa skruvarna till batterihållaren och byt batteriet.
- Dra försiktigt ut LED-skenan ur skåran.
- Följ stegen ovan i omvänt ordning.