


AMPLIFIER INTERFACE CARD

- EN 54-16 COMPLIANT AMPLIFIER INTERFACE CARD
- POWERFUL ON-BOARD DSP CAPABILITY
- DC / IMPEDANCE / LOOP MONITORING (A TO B)
- INDEPENDENTLY MONITORED A / B LINE OUTPUT FED FROM A SINGLE AMPLIFIER
- AUTOMATIC CONTROL OF CHANGEOVER TO STANDBY
- COMPATIBLE WITH THE V2000 MAINFRAME AND INTEGRA

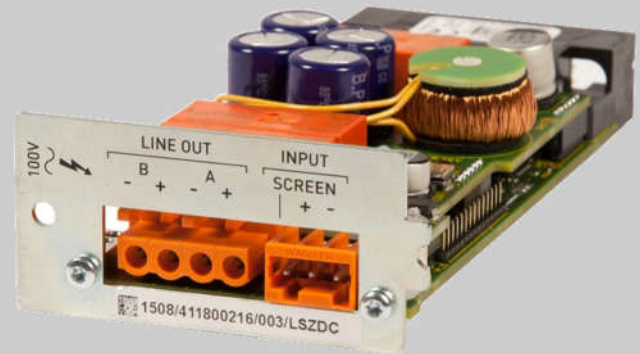

OVERVIEW

The LSZDC is an amplifier interface card for use with the D500 and D150 Transformerless Class-D Amplifiers in a V2000 Amplifier Mainframe for Voice Alarm and Public Address applications. It enables two circuits (A&B) to be fed from a single amplifier while still maintaining BS5839 Pt 8 compliance.

This interface card provides

- amplifier health monitoring via subsonic surveillance tone
- standby switchover
- loudspeaker line earth leakage monitoring
- loudspeaker line 'End Of Line' (EOL) monitoring

Relays in series with each output facilitate isolation of faulty speaker circuits.

Loudspeaker circuits can be monitored using DC, Impedance or Loop Return methods.

Each LSZDC includes powerful on-board DSP (digital signal processing) capability, enabling parametric equalisation, gate and gain settings to be applied separately to each amplifier.

For further details please refer to the amplifier product manual or visit www.asl-control.co.uk.

SPECIFICATION

Power

Quiescent Current (Normal) 15mA
Quiescent Current (Loop Return Mode)..... 39mA

Audio Processing

Gain -60 to +10 dB
Gate Configurable Threshold / Attack / Hold Release
EQ 10 Band Parametric

Interfaces

Audio Input 0dB Balanced Analogue Audio
Loudspeaker Monitoring DC, Loop Return, Impedance
Loudspeaker Outputs Dual A and B outputs

Environmental

Operating -10°C to +55°C¹
Storage -20°C to +55°C
Humidity Range 0% to 93% non-condensing
¹With RAK-FAN-01 fans fitted. Otherwise 40°C. Note that fans are required in certain configurations. See ASL design guide for more information.

Mechanical

Dimensions 64 mm x 30 mm x 121 mm
Weight 0.15 kg
IP Rating IP20 as part of V2000 frame

Compatibility

V2000 Amplifier Mainframe
D500 500W Amplifier Card
D150 150W Amplifier Card
INTEGRA Range All In One Voice Alarm System

Product Codes

LSZDC Amplifier Interface Card



This equipment is designed and manufactured to conform to the following EU Directives:

Electromagnetic Compatibility (EMC): 2014/30/EU
Low Voltage: 2014/35/EU
Restriction of Hazardous Substances (RoHS): 2011/65/EU

Manufacturer:

Application Solutions (Safety and Security) Limited
Unit 17 Cliffe Industrial Estate
Lewes - East Sussex
BN8 6JL - UK
Tel: +44(0)1273 405411 Fax: +44(0)1273 405415
www.asl-control.co.uk



Assessed to ISO 9001

LPCB Cert No: 1043QMS

All rights reserved.

Information contained in this document is believed to be accurate, however no representation or warranty is given and Application Solutions (Safety and Security) Limited assumes no liability with respect to the accuracy of such information.