


























LED INDICATION / LED INDIKERING

SAC-C25

LED INDICATORS

LED indicator Green/Grön	Red/Röd	Status ENG/ SE
		Main power supply / Nätdrift
		Power failure - Emergency-light-operate / Strömavbrott - Nödljus
		Function test / Funktionstest
		Emergency duration test / Driftvaraktighetstest
		Emergency duration <2h / Driftvaraktighetstest <2h
		Illuminant - Charge over defekt / Ljuskälla - omkoppling defekt
		Battery - Charge defect / Batteri - Laddning defekt

MANUAL TEST FUNCTION

TEST button Press _sec	LED Green/Grön	Status ENG/ SE
		Main power supply/ Nätdrift
		A short time emergency operation 5sec/ Kortvarig nöddrift 5sek
		Start function test emergency operation 30sec/ Funktionstest 30sek
		Start emergency duration test 3h/ Driftvarighetstest 3h
		Stop emergency duration test/ Driftvarighetstest avbryts

ENG

Autotest

Once the unit is powered up it will automatically initiate a self test as follows:

Every week : Performs a 30 sec duration test

Every year : Performs a 3h duration test

SE

Autotest

Efter anslutning till nätspänningen aktiveras självtestet enligt nedan:

Varje vecka: Utförs ett 30 sec långt test


Varje år: Utförs ett 3h test

Explanation/ Teckenförklaring			
			
Off Släckt	On Lyser	Flashing Blinkar	Flashing 1/sec Blinkar 1/sec

SAC Nordic AB reserverar sig för eventuella faktur- eller tryckfel i denna trycksak. SAC2017-1

MANUAL SAC-C25

SAC-C25 73 505 53



SAC-C25

Inbyggd Dubbelsidig
Hänvisningsarmatur



SAC Nordic AB • Prästtorpsvägen 16 • S-341 51 Lagan • SWEDEN • www.sacnordic.com

Safe Security Solutions



EMERGENCY LIGHT

SAC-C25

ENG


RECESSED LUMINAIRE

SAC-C25 are a reference fixture with bright LED's and long life burn time. Low energy, low maintenance and long life combined with a auto-testing system and a modern reliable technology allows the fixture to a choice for simplicity, safety and future. Complies with EN60598-2-22.

- Pictograms (interchangeable) for the most common configurations (included)
- Supervised by a self-testing system
- House of steel and acrylic glass
- Battery backup (up to 3 hours emergency operation)
- Maintained or non-maintained
- Accessories: Mounting plate for soft ceilings, shock protection, battery, LED strip, pictograms.

BATTERY REPLACEMENT

1. Loosen one of the LED strip screw and slide it aside.
2. Then loosen the nuts of the plate that holds the battery.

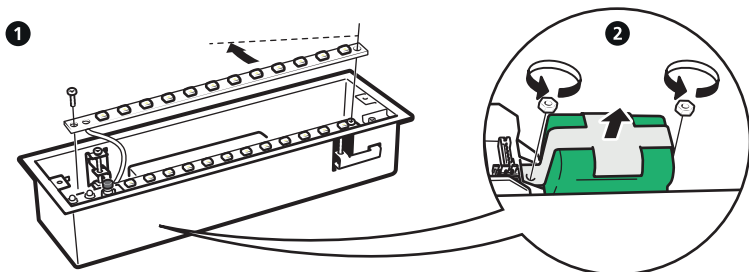

Art.no	E-no	Model	Light source	Viewing distance	Class	Battery backup	Battery Weight
460403	73 505 53	SAC-C25	15 LED	25 m	IP40	NiMH 4,8V 0,8 Ah	3 h
460425	73 513 45	Disabled Pictogram / Piktogram rullstol	25 m	-	-	-	-
460404	73 514 14	Shock protection cover / Bollskydd - 4					
460418	-	SAC-C25 mounting plate / Monteringsplatta för mjuka innertak					
460476	-	Battery pack / Batteripack					
460475	-	LED-strip / LED-list					

SE

INFÄLLD HÄNVISNINGSARMATUR

SAC-C25 är en enkel-/dubbelsidig hänvisningsarmatur för infällt montage. Den har starka lysdioder och lång brinntid. Låg energiförbrukning, låga underhållskostnader och lång livslängd kombinerat med ett självtestande system och en tillförlitlig teknik gör armaturen till ett val för enkelhet, säkerhet och framtid. Uppfyller kraven enligt EN 60598-2-22.

- Medföljer utbytbara piktogram för de vanligaste utföranden (Pil höger, vänster och ner)
- Övervakad med ett självtestande system
- Metallhus och akrylglas
- Inbyggd batteri backup (upp till 3 tim nöddrift)
- Permanentdrift eller nöddrift
- Tillbehör: Monteringsplåt för mjuka innertak, bollskydd, batteri, LED-list, piktogram.

BATTERIBYTE

1. Lossa ena skruven till LED-listen och skjut den åt sidan.
2. Lossa därefter muttrarna till blecket som håller batteriet.







INSTALLATION

SAC-C25



ENG Make sure that the fixture is disconnected from the mains!

SE Se till att armaturen är bortkopplad från elnätet!

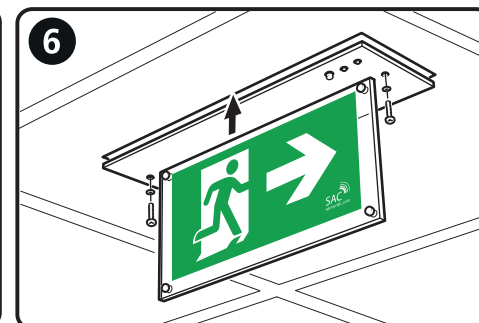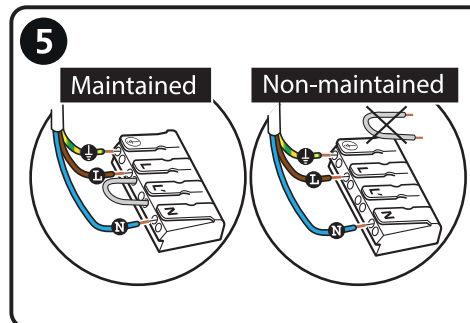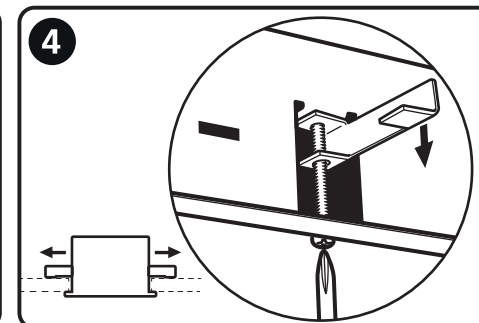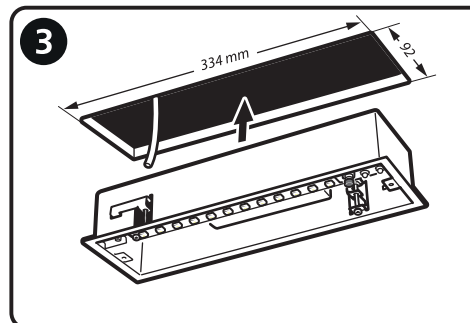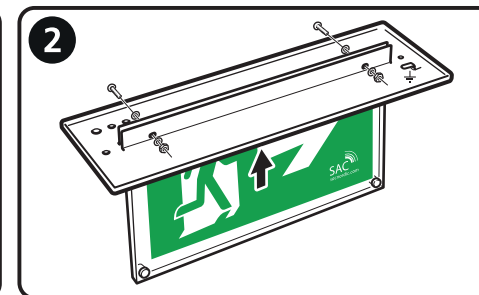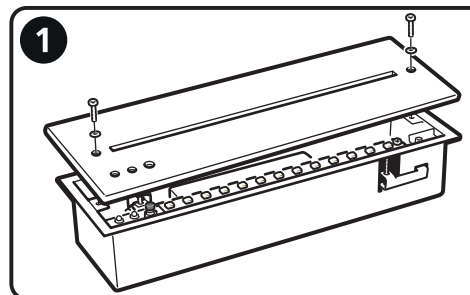

Maintained = Armaturen är kontinuerligt tänd.
Non Maintained = Armaturen tänds upp vid strömbortfall