


LUMINAIRE PHOTOMETRIC TEST REPORT

| | | |
|-------------------------|------------|------------------------|
| NAME: SAC-NACI-LED (DC) | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.:20150901203 |
| MFR.: | SUR.:0.015 | PROTECTION ANGLE: |

| DATA OF LAMP | | PHOTOMETRIC DATA | | | |
|------------------|--------|------------------|--------|-------------------|----------|
| MODEL | | Imax(cd) | 73.44 | S/MH(C0/180) | 1.17 |
| NOMINAL POWER(W) | 4 | LOR(%) | 100.0 | S/MH(C90/270) | 1.25 |
| RATED VOLTAGE(V) | 220 | TOTAL FLUX(lm) | 225.79 | h UP,DN(C0-180) | 0.0,51.8 |
| NOMINAL FLUX(lm) | 225.79 | CIE CLASS | DIRECT | h UP,DN(C180-360) | 0.0,48.2 |
| LAMPS INSIDE | 1 | h up(%) | 0.0 | CIBSE SHR NOM | 1.50 |
| TEST VOLTAGE(V) | | h down(%) | 100.0 | CIBSE SHR MAX | 1.50 |

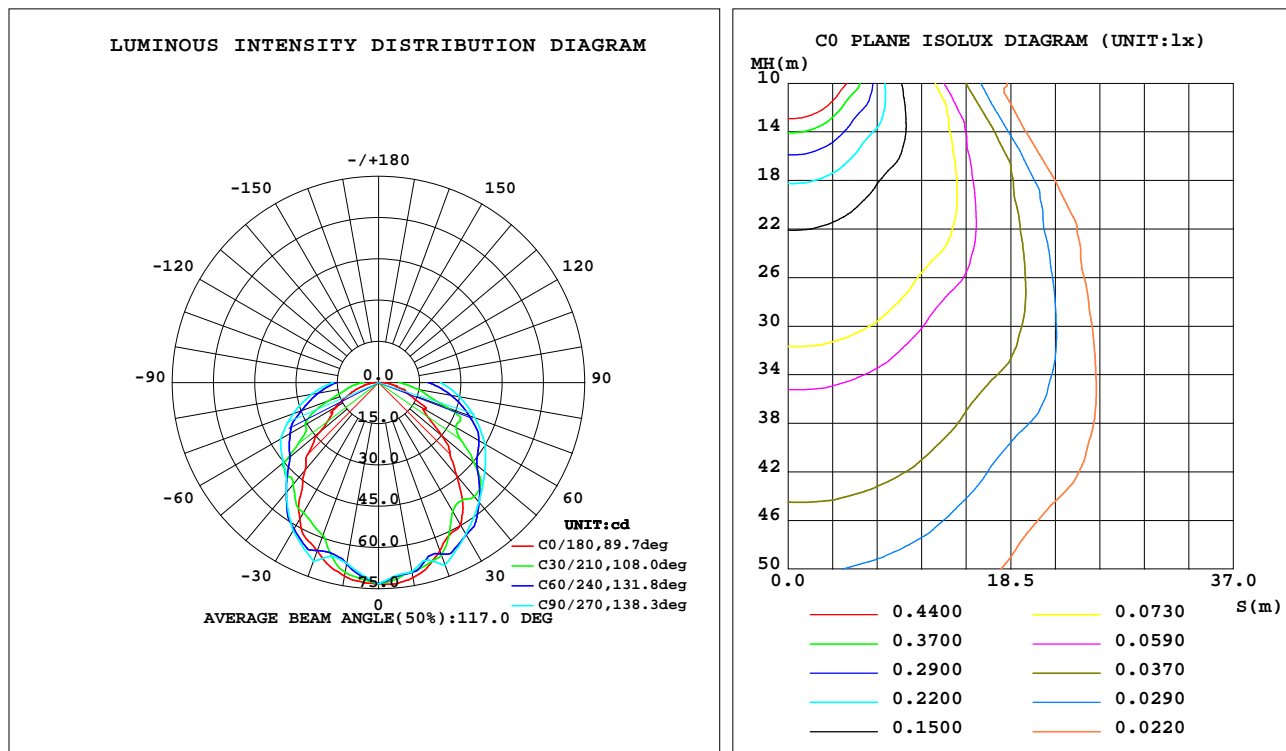

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:黄亚州
Test Date:2015-09-12

g Range: 0 - 90DEG
g Interval: 0.5DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.287
Humidity:60.0%
Test Distance:13.450m [K=1.0000]
Remarks: 3

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

| g | C0 | C45 | C90 | C135 | C180 | C225 | C270 | C315 | g | F zone | F total | %lum,lamp |
|-----|-----------------------|-------|-------|-------|--------|-------|-------|-------|---------|---------|---------|-----------|
| 5 | 73.44 | 71.28 | 70.57 | 70.81 | 72.65 | 71.18 | 70.06 | 71.30 | 0- 5 | 1.721 | 1.721 | 0.76,0.76 |
| 10 | 71.96 | 69.65 | 69.90 | 69.19 | 71.49 | 68.24 | 66.73 | 68.54 | 5- 10 | 5.029 | 6.750 | 2.99,2.99 |
| 15 | 69.29 | 68.22 | 66.94 | 67.40 | 69.07 | 63.21 | 65.56 | 63.96 | 10- 15 | 8.074 | 14.82 | 6.57,6.57 |
| 20 | 65.18 | 63.40 | 70.65 | 62.26 | 65.16 | 61.60 | 69.09 | 62.33 | 15- 20 | 10.89 | 25.71 | 11.4,11.4 |
| 25 | 61.13 | 61.69 | 67.09 | 59.88 | 62.55 | 61.16 | 65.64 | 62.19 | 20- 25 | 13.46 | 39.17 | 17.3,17.3 |
| 30 | 59.55 | 58.66 | 63.52 | 57.56 | 57.33 | 59.72 | 62.19 | 60.42 | 25- 30 | 15.34 | 54.51 | 24.1,24.1 |
| 35 | 53.35 | 56.26 | 60.15 | 56.36 | 49.21 | 57.00 | 57.23 | 56.17 | 30- 35 | 16.85 | 71.35 | 31.6,31.6 |
| 40 | 44.40 | 56.22 | 56.78 | 56.32 | 41.61 | 54.96 | 52.27 | 55.11 | 35- 40 | 17.79 | 89.14 | 39.5,39.5 |
| 45 | 36.77 | 53.62 | 53.45 | 52.28 | 35.97 | 48.52 | 47.60 | 50.51 | 40- 45 | 18.22 | 107.4 | 47.5,47.5 |
| 50 | 29.92 | 50.75 | 50.47 | 48.70 | 27.68 | 42.41 | 45.28 | 43.90 | 45- 50 | 18.09 | 125.5 | 55.6,55.6 |
| 55 | 21.92 | 45.24 | 47.53 | 43.18 | 21.09 | 34.79 | 43.24 | 37.17 | 50- 55 | 17.18 | 142.6 | 63.2,63.2 |
| 60 | 18.91 | 39.84 | 44.59 | 36.44 | 17.41 | 31.04 | 41.21 | 33.11 | 55- 60 | 16.17 | 158.8 | 70.3,70.3 |
| 65 | 14.64 | 34.14 | 40.90 | 30.86 | 14.34 | 27.40 | 37.08 | 29.36 | 60- 65 | 15.38 | 174.2 | 77.1,77.1 |
| 70 | 10.90 | 28.76 | 37.22 | 26.46 | 10.49 | 24.07 | 32.96 | 24.58 | 65- 70 | 13.97 | 188.1 | 83.3,83.3 |
| 75 | 8.723 | 23.60 | 33.54 | 22.15 | 7.053 | 20.08 | 28.84 | 20.61 | 70- 75 | 12.13 | 200.3 | 88.7,88.7 |
| 80 | 5.355 | 18.88 | 29.85 | 17.68 | 4.672 | 15.47 | 24.72 | 17.00 | 75- 80 | 10.33 | 210.6 | 93.3,93.3 |
| 85 | 3.426 | 14.20 | 26.17 | 12.56 | 2.598 | 11.34 | 20.60 | 13.11 | 80- 85 | 8.486 | 219.1 | 97.97 |
| 90 | 0 | 9.559 | 22.49 | 7.615 | 0.0682 | 7.551 | 16.47 | 9.374 | 85- 90 | 6.697 | 225.8 | 100,100 |
| 95 | | | | | | | | | 90- 95 | | | |
| 100 | | | | | | | | | 95-100 | | | |
| 105 | | | | | | | | | 100-105 | | | |
| 110 | | | | | | | | | 105-110 | | | |
| 115 | | | | | | | | | 110-115 | | | |
| 120 | | | | | | | | | 115-120 | | | |
| 125 | | | | | | | | | 120-125 | | | |
| 130 | | | | | | | | | 125-130 | | | |
| 135 | | | | | | | | | 130-135 | | | |
| 140 | | | | | | | | | 135-140 | | | |
| 145 | | | | | | | | | 140-145 | | | |
| 150 | | | | | | | | | 145-150 | | | |
| 155 | | | | | | | | | 150-155 | | | |
| 160 | | | | | | | | | 155-160 | | | |
| 165 | | | | | | | | | 160-165 | | | |
| 170 | | | | | | | | | 165-170 | | | |
| 175 | | | | | | | | | 170-175 | | | |
| 180 | | | | | | | | | 175-180 | | | |
| DEG | LUMINOUS INTENSITY:cd | | | | | | | | | UNIT:lm | | |


C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:黄亚州
Test Date:2015-09-12

g Range: 0 - 90DEG
g Interval: 0.5DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.287
Humidity:60.0%
Test Distance:13.450m [K=1.0000]
Remarks: 3

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

| | | |
|-------------------------|------------|------------------------|
| NAME: SAC-NACI-LED (DC) | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.:20150901203 |
| MFR.: | SUR.:0.015 | PROTECTION ANGLE: |

| | | | | | | | | | | | | | | | | |
|-----|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|---|
| rcc | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
| rw | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| rfe | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| RCR | RCR:Room Cavity Ratio | | | | | | | | | | | | | | | |

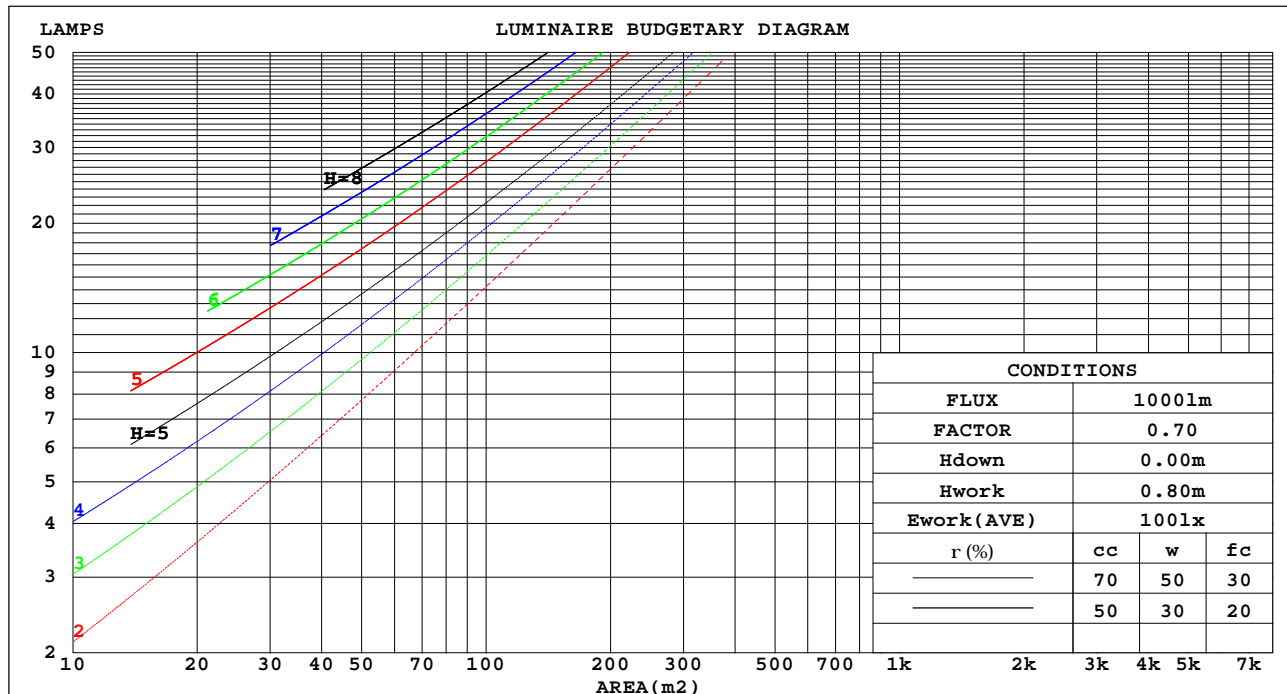

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 黄亚州
Test Date: 2015-09-12

g Range: 0 - 90DEG
g Interval: 0.5DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.287
Humidity: 60.0%
Test Distance: 13.450m [K=1.0000]
Remarks: 3

WEC AND CCEC

| | | |
|-------------------------|------------|------------------------|
| NAME: SAC-NACI-LED (DC) | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.:20150901203 |
| MFR.: | SUR.:0.015 | PROTECTION ANGLE: |

| rcc | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 | |
|------|-----------------------|------|------|------|------|------|---------------------------------|------|------|------|------|------|------|------|------|---|--|
| rw | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 | |
| rfc | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 | |
| RCR | RCR:Room Cavity Ratio | | | | | | Wall Exitance Coefficients(WEC) | | | | | | | | | | |
| 0.0 | | | | | | | | | | | | | | | | | |
| 1.0 | .376 | .214 | .068 | .369 | .210 | .067 | .355 | .204 | .065 | .343 | .198 | .063 | .331 | .192 | .062 | | |
| 2.0 | .331 | .181 | .056 | .324 | .179 | .055 | .312 | .174 | .054 | .301 | .169 | .053 | .291 | .165 | .052 | | |
| 3.0 | .296 | .158 | .047 | .290 | .156 | .047 | .280 | .152 | .046 | .270 | .148 | .045 | .261 | .144 | .045 | | |
| 4.0 | .268 | .139 | .041 | .263 | .138 | .041 | .253 | .134 | .040 | .245 | .131 | .040 | .236 | .128 | .039 | | |
| 5.0 | .244 | .124 | .036 | .240 | .123 | .036 | .231 | .120 | .035 | .224 | .118 | .035 | .216 | .116 | .035 | | |
| 6.0 | .224 | .112 | .032 | .220 | .111 | .032 | .213 | .109 | .032 | .206 | .107 | .031 | .199 | .105 | .031 | | |
| 7.0 | .207 | .102 | .029 | .204 | .101 | .029 | .197 | .100 | .029 | .191 | .098 | .028 | .185 | .096 | .028 | | |
| 8.0 | .192 | .094 | .026 | .189 | .093 | .026 | .183 | .092 | .026 | .178 | .090 | .026 | .172 | .089 | .026 | | |
| 9.0 | .179 | .087 | .024 | .177 | .086 | .024 | .171 | .085 | .024 | .166 | .083 | .024 | .162 | .082 | .024 | | |
| 10.0 | .168 | .081 | .022 | .166 | .080 | .022 | .161 | .079 | .022 | .156 | .078 | .022 | .152 | .076 | .022 | | |

| rcc | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
|------|-----------------------|------|------|------|------|------|--|------|------|------|------|------|------|------|------|---|
| rw | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| rfc | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| RCR | RCR:Room Cavity Ratio | | | | | | Ceiling Cavity Exitance Coefficients(CCEC) | | | | | | | | | |
| 0.0 | .190 | .190 | .190 | .163 | .163 | .163 | .111 | .111 | .111 | .064 | .064 | .064 | .020 | .020 | .020 | |
| 1.0 | .185 | .156 | .129 | .158 | .133 | .111 | .108 | .092 | .077 | .062 | .053 | .045 | .020 | .017 | .014 | |
| 2.0 | .177 | .132 | .093 | .152 | .113 | .081 | .104 | .078 | .056 | .060 | .046 | .033 | .019 | .015 | .011 | |
| 3.0 | .170 | .114 | .071 | .145 | .099 | .061 | .100 | .069 | .043 | .058 | .040 | .025 | .019 | .013 | .008 | |
| 4.0 | .161 | .101 | .056 | .139 | .088 | .048 | .095 | .061 | .034 | .055 | .036 | .020 | .018 | .012 | .007 | |
| 5.0 | .153 | .091 | .045 | .132 | .079 | .039 | .091 | .055 | .028 | .053 | .032 | .016 | .017 | .011 | .005 | |
| 6.0 | .146 | .083 | .038 | .125 | .072 | .033 | .086 | .050 | .023 | .050 | .030 | .014 | .016 | .010 | .005 | |
| 7.0 | .139 | .076 | .032 | .119 | .066 | .028 | .082 | .046 | .020 | .048 | .027 | .012 | .015 | .009 | .004 | |
| 8.0 | .132 | .070 | .028 | .113 | .061 | .024 | .078 | .043 | .017 | .046 | .025 | .010 | .015 | .008 | .003 | |
| 9.0 | .125 | .065 | .025 | .108 | .057 | .021 | .075 | .040 | .015 | .044 | .023 | .009 | .014 | .008 | .003 | |
| 10.0 | .119 | .061 | .022 | .103 | .053 | .019 | .071 | .037 | .014 | .042 | .022 | .008 | .013 | .007 | .003 | |

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:黄亚州
Test Date:2015-09-12

g Range: 0 - 90DEG
g Interval: 0.5DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.287
Humidity:60.0%
Test Distance:13.450m [K=1.0000]
Remarks: 3

UGR(Unified Glare Rating) Table

| | | | | | | | | | | | | | | |
|--|---------------|------|------|------|------------------|---------------|------|------|------|------------------------|--|--|--|--|
| NAME: SAC-NACI-LED (DC) | | | | | TYPE: | | | | | WEIGHT: | | | | |
| SPEC.: | | | | | DIM.: | | | | | SERIAL No.:20150901203 | | | | |
| MFR.: | | | | | SUR.:0.015 | | | | | PROTECTION ANGLE: | | | | |
| ceiling/cavity | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | | | | |
| walls | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | | | | |
| working plane | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | | | | |
| Room dimensions | | | | | Viewed crosswise | | | | | Viewed endwise | | | | |
| x = 2H y = 2H | 16.8 | 18.4 | 17.1 | 18.6 | 18.8 | 19.3 | 21.0 | 19.6 | 21.2 | 21.4 | | | | |
| | 17.8 | 19.3 | 18.1 | 19.6 | 19.8 | 21.9 | 23.4 | 22.2 | 23.6 | 23.9 | | | | |
| | 18.2 | 19.6 | 18.5 | 19.9 | 20.2 | 23.3 | 24.7 | 23.6 | 25.0 | 25.2 | | | | |
| | 18.5 | 19.9 | 18.9 | 20.2 | 20.5 | 24.8 | 26.1 | 25.1 | 26.4 | 26.7 | | | | |
| | 18.7 | 20.0 | 19.0 | 20.3 | 20.6 | 25.6 | 26.9 | 26.0 | 27.2 | 27.5 | | | | |
| | 18.8 | 20.1 | 19.1 | 20.4 | 20.7 | 26.6 | 27.8 | 26.9 | 28.1 | 28.4 | | | | |
| 4H | 18.2 | 19.7 | 18.5 | 19.9 | 20.2 | 20.0 | 21.5 | 20.4 | 21.7 | 22.0 | | | | |
| | 19.7 | 21.0 | 20.1 | 21.3 | 21.6 | 22.8 | 24.1 | 23.2 | 24.4 | 24.7 | | | | |
| | 20.3 | 21.5 | 20.7 | 21.8 | 22.2 | 24.4 | 25.6 | 24.8 | 25.9 | 26.2 | | | | |
| | 20.7 | 21.8 | 21.1 | 22.1 | 22.5 | 26.1 | 27.2 | 26.5 | 27.5 | 27.9 | | | | |
| | 20.9 | 21.9 | 21.3 | 22.2 | 22.6 | 27.1 | 28.1 | 27.5 | 28.4 | 28.8 | | | | |
| | 21.0 | 21.9 | 21.5 | 22.3 | 22.7 | 28.2 | 29.1 | 28.6 | 29.5 | 29.9 | | | | |
| 8H | 21.5 | 22.5 | 22.0 | 22.9 | 23.3 | 24.7 | 25.7 | 25.2 | 26.1 | 26.5 | | | | |
| | 22.4 | 23.2 | 22.8 | 23.6 | 24.1 | 26.8 | 27.6 | 27.2 | 28.0 | 28.5 | | | | |
| | 22.7 | 23.4 | 23.2 | 23.9 | 24.3 | 28.0 | 28.7 | 28.4 | 29.2 | 29.6 | | | | |
| | 22.9 | 23.6 | 23.4 | 24.0 | 24.5 | 29.3 | 30.0 | 29.8 | 30.4 | 30.9 | | | | |
| 12H | 21.9 | 22.8 | 22.3 | 23.2 | 23.6 | 24.8 | 25.7 | 25.2 | 26.1 | 26.5 | | | | |
| | 23.0 | 23.7 | 23.4 | 24.1 | 24.6 | 26.9 | 27.6 | 27.3 | 28.1 | 28.5 | | | | |
| | 23.5 | 24.1 | 24.0 | 24.6 | 25.1 | 28.2 | 28.8 | 28.6 | 29.3 | 29.8 | | | | |
| Variations with the observer position at spacings: | | | | | | | | | | | | | | |
| S = 1.0H | + 0.1 / - 0.2 | | | | | + 0.1 / - 0.1 | | | | | | | | |
| 1.5H | + 0.2 / - 0.2 | | | | | + 0.2 / - 0.3 | | | | | | | | |
| 2.0H | + 0.5 / - 0.4 | | | | | + 0.3 / - 0.4 | | | | | | | | |

CIE Pub.117 Corrected 225.8 lm Total Lamp Luminous Flux.(8log(F/F0) = -5.2)

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:黄亚州
Test Date:2015-09-12

g Range: 0 - 90DEG
g Interval: 0.5DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.287
Humidity:60.0%
Test Distance:13.450m [K=1.0000]
Remarks: 3

UTILIZATION FACTORS TABLE

| | | |
|-------------------------|------------|------------------------|
| NAME: SAC-NACI-LED (DC) | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.:20150901203 |
| MFR.: | SUR.:0.015 | PROTECTION ANGLE: |

| REFLECTANCE | | | | | | | | | | |
|----------------------------------|---|-----|-----|-----|-----|-----|-----|-----|-----|--------|
| Ceiling | 0.8 | 0.8 | 0.8 | 0.7 | 0.7 | 0.7 | 0.5 | 0.5 | 0.5 | 0 |
| Walls | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0 |
| Working plane | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0 |
| ROOM INDEX | UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5 | | | | | | | | | |
| k = 0.60 | 55 | 43 | 36 | 54 | 43 | 36 | 53 | 42 | 35 | 29 |
| 0.80 | 64 | 52 | 44 | 63 | 52 | 44 | 62 | 51 | 44 | 37 |
| 1.00 | 72 | 61 | 53 | 71 | 60 | 52 | 69 | 62 | 52 | 44 |
| 1.25 | 79 | 68 | 60 | 78 | 67 | 60 | 75 | 66 | 59 | 51 |
| 1.50 | 84 | 73 | 66 | 83 | 72 | 65 | 79 | 71 | 64 | 56 |
| 2.00 | 91 | 82 | 74 | 89 | 80 | 73 | 86 | 78 | 72 | 63 |
| 2.50 | 95 | 87 | 80 | 93 | 85 | 79 | 89 | 82 | 77 | 68 |
| 3.00 | 99 | 91 | 85 | 97 | 89 | 83 | 92 | 86 | 81 | 72 |
| 4.00 | 103 | 97 | 91 | 101 | 95 | 90 | 96 | 91 | 87 | 77 |
| 5.00 | 106 | 100 | 95 | 104 | 98 | 94 | 99 | 94 | 91 | 81 |
| ROOM INDEX | UF(total) | | | | | | | | | Direct |
| According to DIN EN 13032-2 2004 | | | | | | | | | | |
| Suspended | | | | | | | | | | |
| SHRNOM = 1.25 | | | | | | | | | | |

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:黄亚州
Test Date:2015-09-12

g Range: 0 - 90DEG
g Interval: 0.5DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.287
Humidity:60.0%
Test Distance:13.450m [K=1.0000]
Remarks: 3

ISOCANDELA DIAGRAM

| | | |
|-------------------------|------------|------------------------|
| NAME: SAC-NACI-LED (DC) | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.:20150901203 |
| MFR.: | SUR.:0.015 | PROTECTION ANGLE: |

Conical surface Flux(90deg):

107.36 lm

%lum = 47.5%


%lamp = 47.5%

Conical surface Flux(120deg):

158.8 lm

%lum = 70.3%

%lamp = 70.3%

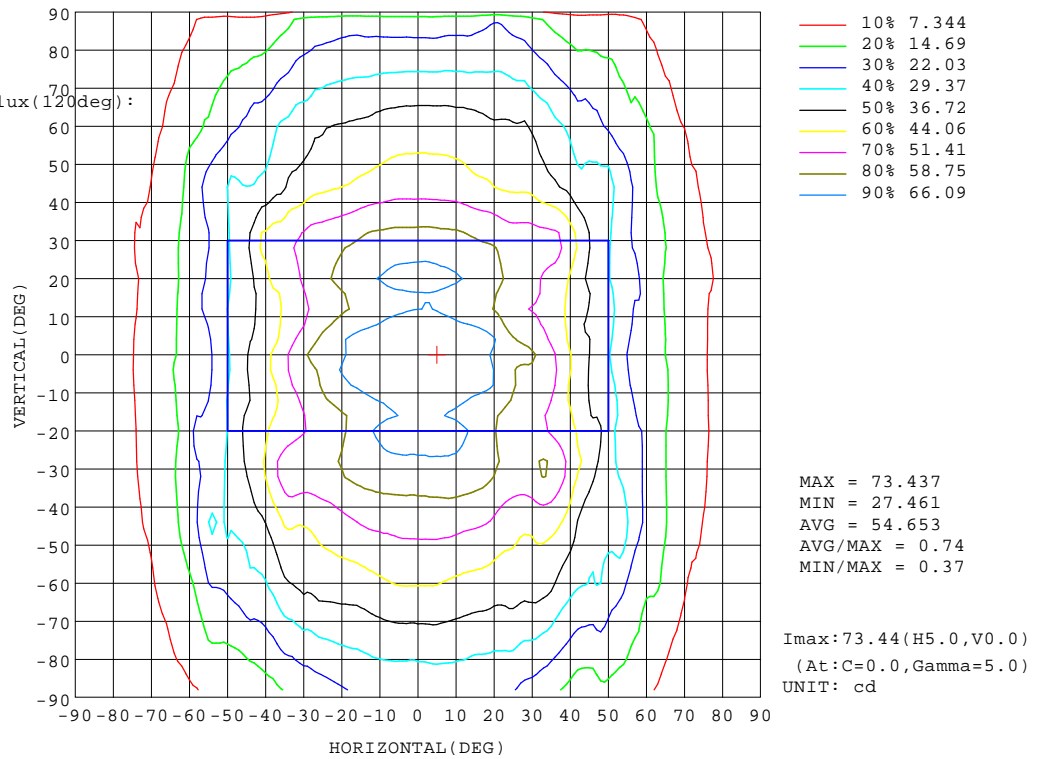

C Range: 0 - 360DEG

C Interval: 5.0DEG

Test Speed: HIGH

Temperature: 20DEG

Operators: 黄亚州

Test Date: 2015-09-12

g Range: 0 - 90DEG

g Interval: 0.5DEG

Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.287


Humidity: 60.0%

Test Distance: 13.450m [K=1.0000]

Remarks: 3

AAI Figure

| | | |
|-------------------------|------------|------------------------|
| NAME: SAC-NACI-LED (DC) | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.:20150901203 |
| MFR.: | SUR.:0.015 | PROTECTION ANGLE: |

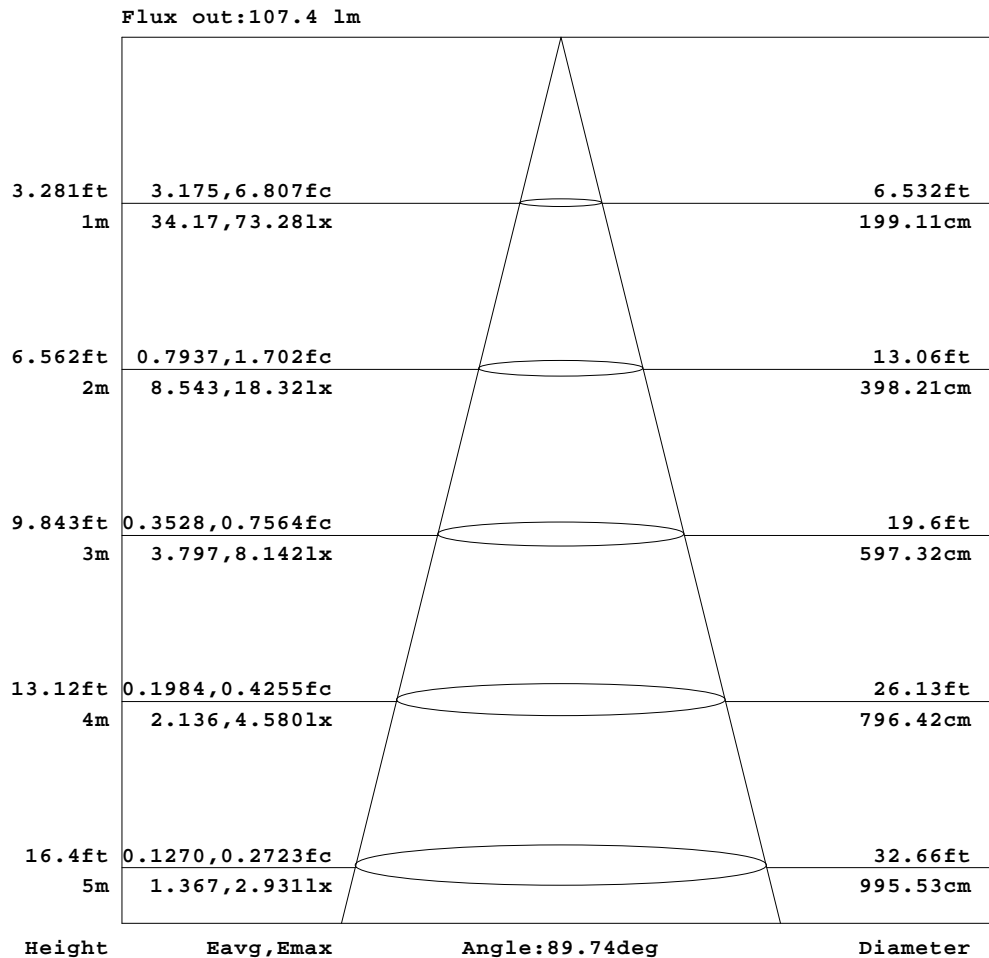


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:黄亚州
Test Date:2015-09-12

g Range: 0 - 90DEG
g Interval: 0.5DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.287
Humidity:60.0%
Test Distance:13.450m [K=1.0000]
Remarks: 3

ISOLUX DIAGRAM


| | | |
|-------------------------|------------|------------------------|
| NAME: SAC-NACI-LED (DC) | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.:20150901203 |
| MFR.: | SUR.:0.015 | PROTECTION ANGLE: |

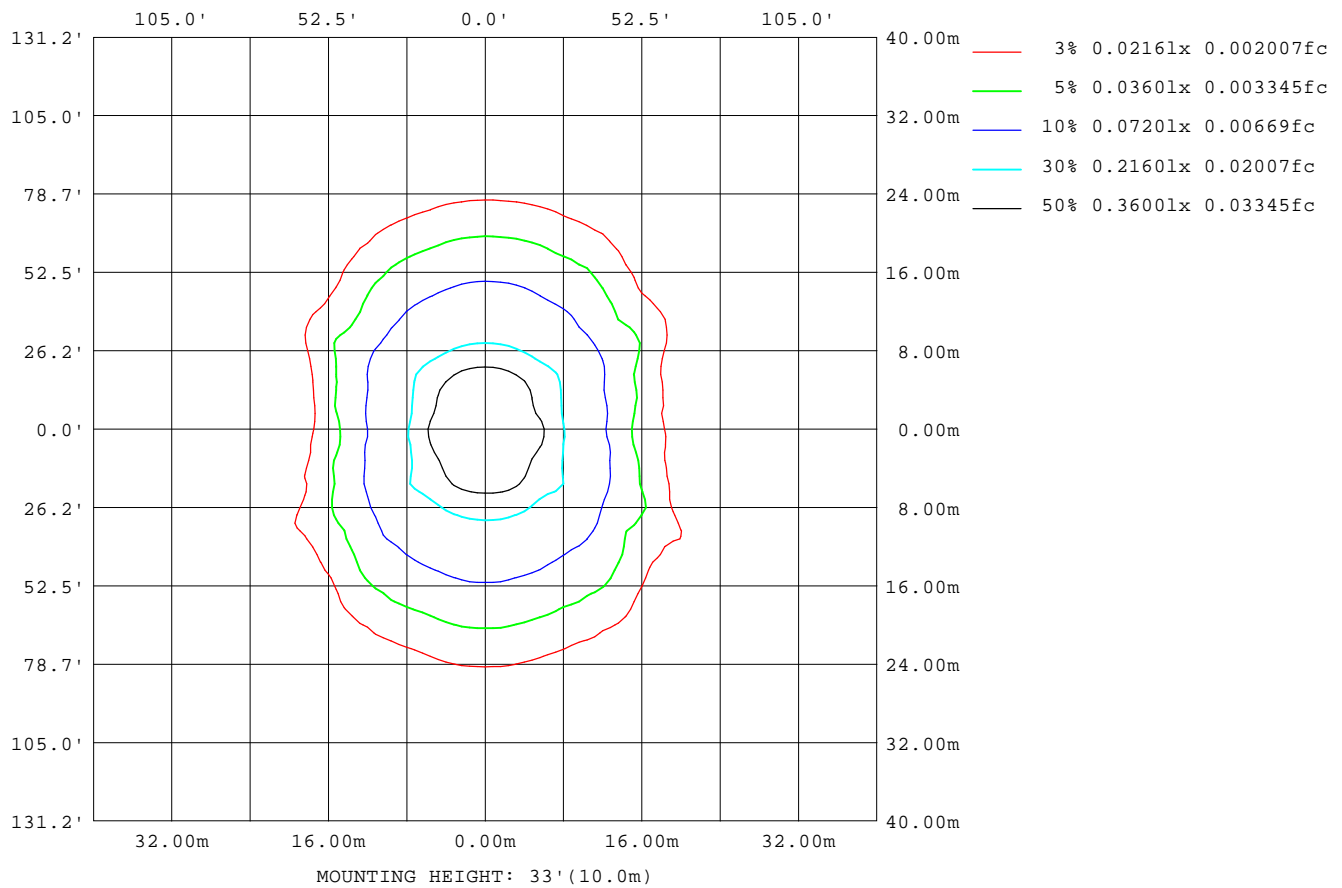

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:黄亚州
Test Date:2015-09-12

g Range: 0 - 90DEG
g Interval: 0.5DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.287
Humidity:60.0%
Test Distance:13.450m [K=1.0000]
Remarks: 3

Planar Illuminance Curve

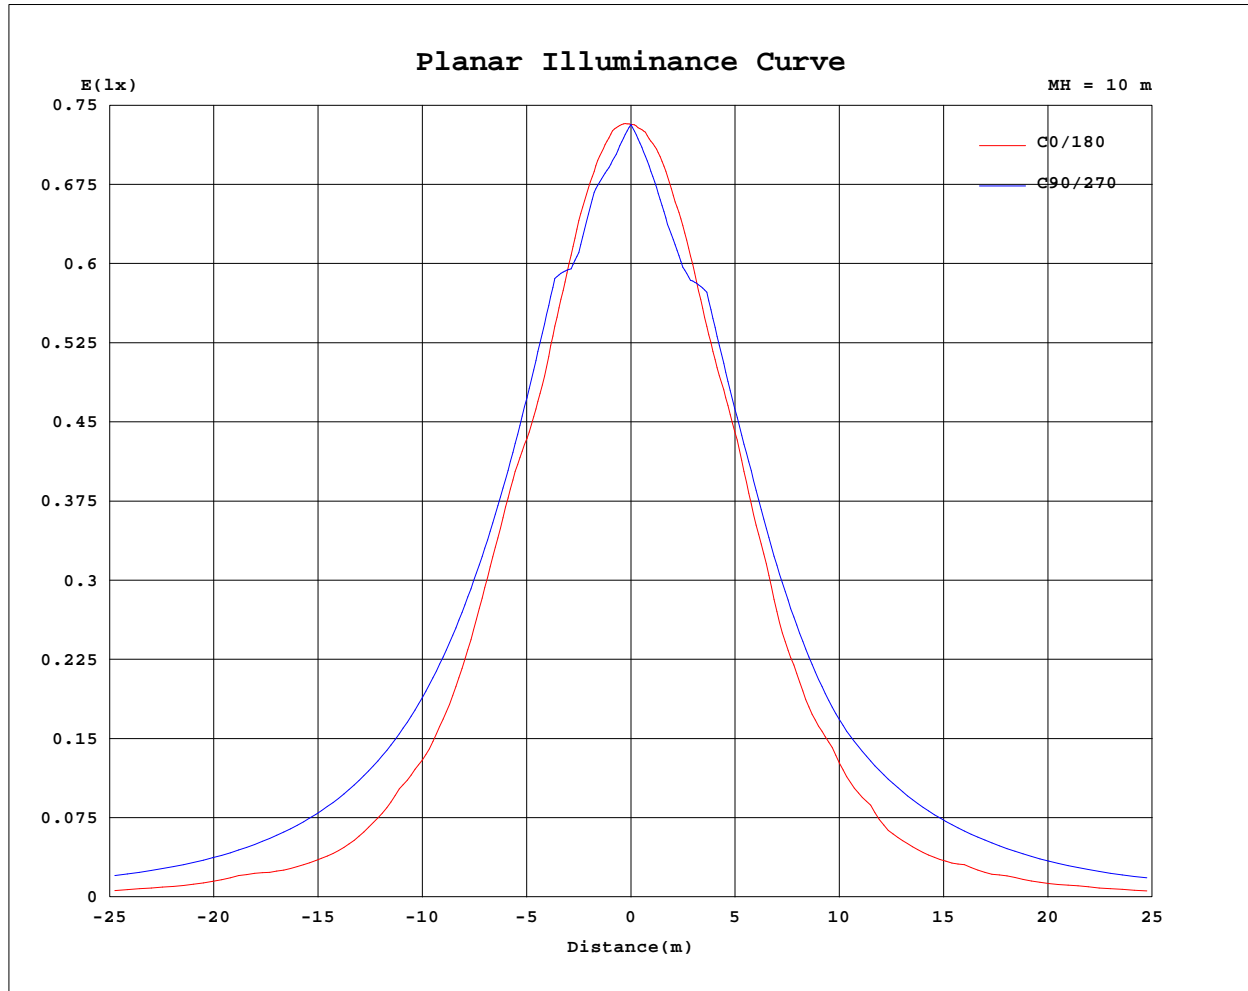

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 黄亚州
Test Date: 2015-09-12

g Range: 0 - 90DEG
g Interval: 0.5DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.287
Humidity: 60.0%
Test Distance: 13.450m [K=1.0000]
Remarks: 3

C:\Documents and Settings\Administrator\桌面\SAC-NACI-LED(PC).GOS

C:\Documents and Settings\Administrator\桌面\SAC-NACI-LED(DC).GOS

