


# LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:0V I:0A P:0W PF:0 Lamp Flux:573.957x1 lm		
NAME: NEMD2/W/1H/AT/LFP/WH	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2021012001
MFR.: JEWOO	SUR.:0.0001	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	NEMD2/W/1H/AT/LFP/WH	Imax(cd)	135.8	S/MH(C0/180)	1.63
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.55
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	573.96	$\eta$ UP,DN(C0-180)	0.0,51.9
NOMINAL FLUX(lm)	573.957	CIE CLASS	DIRECT	$\eta$ UP,DN(C180-360)	0.0,48.1
LAMPS INSIDE	1	$\eta$ up(%)	0.0	CIBSE SHR NOM	1.75
TEST VOLTAGE(V)	220	$\eta$ down(%)	100.0	CIBSE SHR MAX	1.75

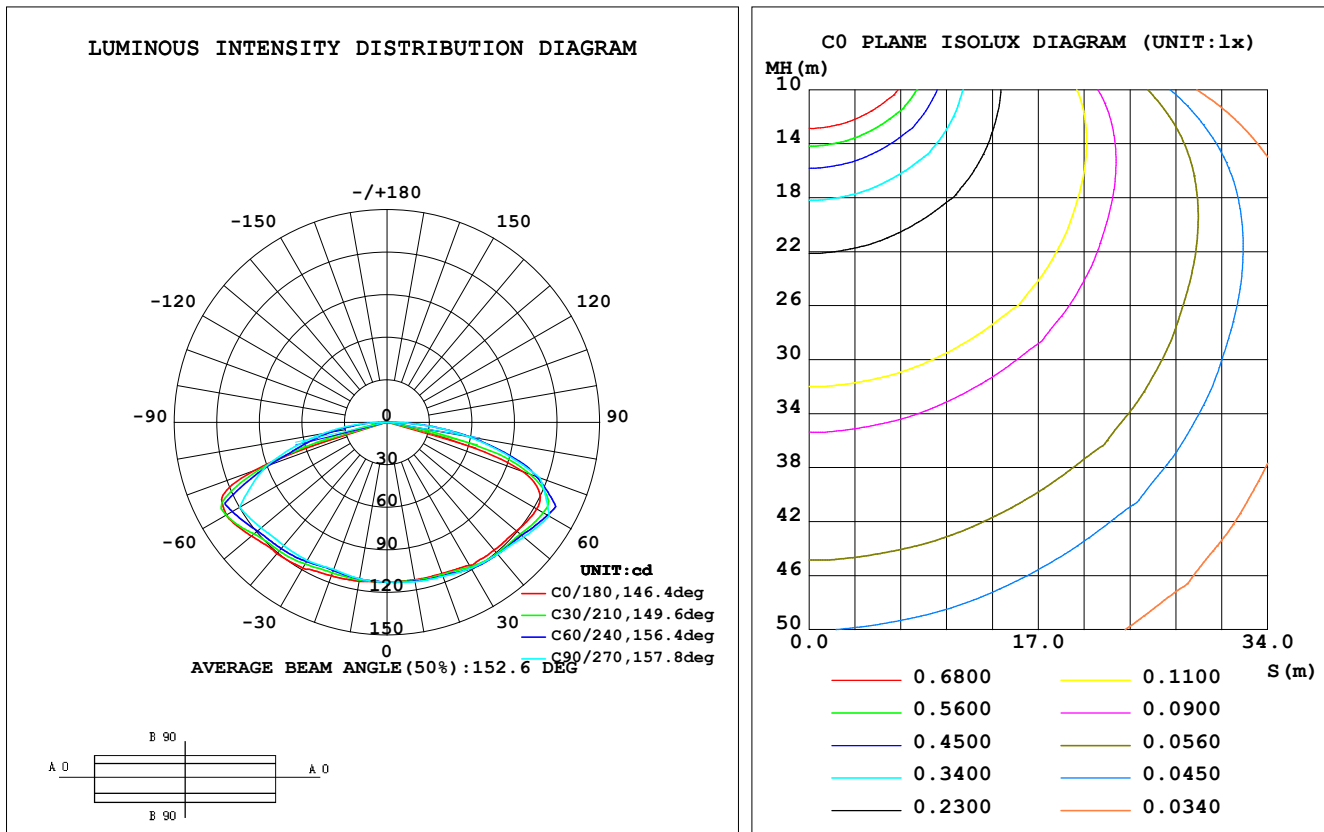

C Range: 0 - 360DEG  
C Interval: 5.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:WLM  
Test Date:2021-01-20

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 0.5DEG  
Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.287  
Humidity:65.0%  
Test Distance:13.693m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
5	112.6	112.9	113.1	112.9	112.8	112.5	112.5	112.7	0- 5	2.694	2.694	0.47,0.47
10	112.8	113.5	114.1	113.8	113.8	112.4	112.1	112.5	5- 10	8.080	10.77	1.88,1.88
15	113.1	114.1	114.8	114.7	114.4	112.1	111.1	112.3	10- 15	13.44	24.21	4.22,4.22
20	113.5	114.9	115.6	115.5	115.2	112.1	110.2	111.8	15- 20	18.70	42.91	7.48,7.48
25	114.5	115.9	117.2	116.5	116.2	112.3	111.4	111.7	20- 25	23.91	66.83	11.6,11.6
30	116.5	117.7	118.8	118.6	118.8	113.9	112.5	112.9	25- 30	29.21	96.04	16.7,16.7
35	117.2	120.0	120.1	121.8	119.8	116.3	113.0	114.8	30- 35	34.52	130.6	22.7,22.7
40	117.6	121.7	121.4	123.7	120.9	118.0	113.4	115.4	35- 40	39.53	170.1	29.6,29.6
45	118.1	122.7	122.9	125.8	121.9	119.5	114.1	116.5	40- 45	44.24	214.3	37.3,37.3
50	119.2	124.0	125.9	128.5	124.8	122.5	116.0	117.9	45- 50	48.92	263.3	45.9,45.9
55	121.0	125.9	129.0	131.8	128.3	126.1	118.0	120.0	50- 55	53.79	317.0	55.2,55.2
60	122.0	128.0	132.1	133.1	130.7	127.4	120.1	120.0	55- 60	58.45	375.5	65.4,65.4
65	118.8	128.5	123.5	132.3	128.8	126.1	105.5	118.1	60- 65	61.15	436.6	76.1,76.1
70	102.2	111.9	114.8	108.1	100.1	98.33	90.89	94.90	65- 70	57.60	494.2	86.1,86.1
75	36.50	70.97	86.18	50.75	15.38	36.32	68.26	42.42	70- 75	42.00	536.2	93.4,93.4
80	7.109	43.71	57.52	27.90	5.099	18.61	45.62	23.47	75- 80	22.03	558.3	97.3,97.3
85	2.218	21.26	28.87	13.12	0.7914	8.972	22.98	11.37	80- 85	11.75	570.0	99.3,99.3
90	0.0997	0.3434	0.2104	0.2326	0.0554	0.3433	0.3433	0.4981	85- 90	3.933	574.0	100,100
95									90- 95			
100									95-100			
105									100-105			
110									105-110			
115									110-115			
120									115-120			
125									120-125			
130									125-130			
135									130-135			
140									135-140			
145									140-145			
150									145-150			
155									150-155			
160									155-160			
165									160-165			
170									165-170			
175									170-175			
180									175-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:WLM  
 Test Date:2021-01-20

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.287  
 Humidity:65.0%  
 Test Distance:13.693m [K=1.0000]  
 Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:0V I:0A P:0W PF:0 Lamp Flux:573.957x1 lm		
NAME: NEMD2/W/1H/AT/LFP/WH	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2021012001
MFR.: JEWOO	SUR.:0.0001	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.01	.96	.91	.98	.94	.90	.94	.90	.87	.90	.87	.84	.86	.84	.81	.79
2.0	.85	.77	.70	.83	.76	.69	.79	.73	.68	.76	.71	.66	.73	.68	.65	.62
3.0	.73	.63	.56	.71	.62	.55	.68	.60	.54	.65	.58	.53	.62	.57	.52	.50
4.0	.63	.53	.45	.61	.52	.45	.59	.51	.44	.56	.49	.43	.54	.48	.43	.40
5.0	.55	.45	.37	.54	.44	.37	.52	.43	.37	.50	.42	.36	.48	.41	.36	.33
6.0	.49	.39	.32	.48	.38	.31	.46	.37	.31	.44	.37	.31	.42	.36	.30	.28
7.0	.44	.34	.27	.43	.34	.27	.41	.33	.27	.40	.32	.27	.38	.31	.26	.24
8.0	.39	.30	.24	.39	.30	.24	.37	.29	.23	.36	.29	.23	.35	.28	.23	.21
9.0	.36	.27	.21	.35	.27	.21	.34	.26	.21	.33	.26	.21	.32	.25	.20	.18
10.0	.33	.24	.19	.32	.24	.19	.31	.24	.18	.30	.23	.18	.29	.23	.18	.16

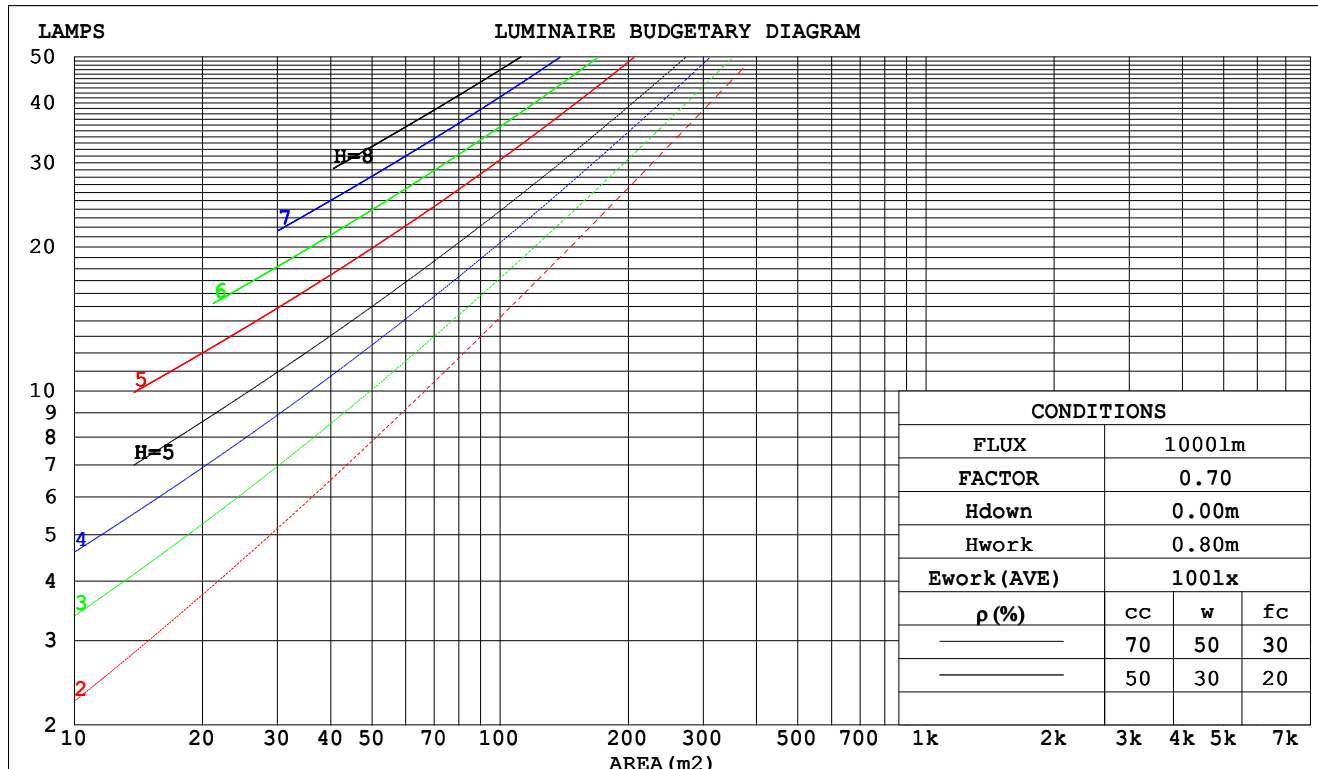

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:WLM  
 Test Date:2021-01-20

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.287  
 Humidity:65.0%  
 Test Distance:13.693m [K=1.0000]  
 Remarks:

## WEC AND CCEC

Test:U:0V I:0A P:0W PF:0 Lamp Flux:573.957x1 lm		
NAME: NEMD2/W/1H/AT/LFP/WH	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2021012001
MFR.: JEWOO	SUR.:0.0001	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.368	.209	.066	.361	.206	.065	.347	.199	.064	.335	.193	.062	.324	.188	.060		
2.0	.343	.188	.058	.336	.185	.057	.324	.180	.056	.313	.176	.055	.303	.171	.054		
3.0	.313	.166	.050	.307	.164	.049	.296	.160	.049	.286	.157	.048	.277	.153	.047		
4.0	.285	.148	.043	.280	.146	.043	.270	.143	.043	.261	.140	.042	.252	.137	.042		
5.0	.260	.132	.038	.255	.131	.038	.247	.128	.038	.239	.126	.037	.231	.123	.037		
6.0	.238	.119	.034	.234	.118	.034	.226	.116	.034	.219	.114	.033	.213	.112	.033		
7.0	.219	.109	.031	.216	.108	.031	.209	.106	.030	.203	.104	.030	.197	.102	.030		
8.0	.203	.099	.028	.200	.098	.028	.194	.097	.028	.188	.095	.027	.183	.094	.027		
9.0	.189	.091	.026	.186	.091	.025	.181	.089	.025	.175	.088	.025	.171	.087	.025		
10.0	.176	.085	.023	.174	.084	.023	.169	.083	.023	.164	.082	.023	.160	.080	.023		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.184	.156	.130	.158	.134	.112	.108	.092	.077	.062	.053	.045	.020	.017	.015	
2.0	.179	.132	.092	.153	.113	.079	.105	.078	.055	.061	.046	.032	.019	.015	.011	
3.0	.173	.115	.068	.148	.099	.059	.102	.069	.042	.059	.040	.024	.019	.013	.008	
4.0	.166	.102	.053	.142	.088	.046	.098	.061	.032	.057	.036	.019	.018	.012	.006	
5.0	.158	.092	.043	.136	.079	.037	.094	.055	.026	.054	.033	.016	.017	.011	.005	
6.0	.151	.084	.036	.129	.072	.031	.089	.051	.022	.052	.030	.013	.017	.010	.004	
7.0	.143	.077	.030	.123	.067	.026	.085	.047	.019	.049	.028	.011	.016	.009	.004	
8.0	.136	.071	.026	.117	.062	.023	.081	.043	.016	.047	.026	.010	.015	.008	.003	
9.0	.129	.066	.023	.112	.057	.020	.077	.040	.015	.045	.024	.009	.015	.008	.003	
10.0	.123	.062	.021	.106	.054	.018	.074	.038	.013	.043	.022	.008	.014	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:WLM  
 Test Date:2021-01-20

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.287  
 Humidity:65.0%  
 Test Distance:13.693m [K=1.0000]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:0V I:0A P:0W PF:0 Lamp Flux:573.957x1 lm											
NAME: NEMD2/W/1H/AT/LFP/WH					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:2021012001			
MFR.: JEWOO					SUR.:0.0001			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		40.6	42.3	40.8	42.5	42.7	40.8	42.6	41.1	42.8	43.0
	3H	43.3	44.9	43.6	45.2	45.4	43.7	45.3	44.0	45.5	45.8
	4H	43.9	45.4	44.2	45.7	45.9	44.9	46.4	45.2	46.6	46.9
	6H	43.8	45.3	44.2	45.5	45.8	45.7	47.2	46.1	47.4	47.7
	8H	43.8	45.2	44.1	45.5	45.8	46.0	47.4	46.4	47.7	48.0
	12H	43.7	45.1	44.1	45.4	45.7	46.3	47.6	46.6	47.9	48.2
4H	2H	41.7	43.3	42.0	43.5	43.8	41.9	43.4	42.2	43.7	44.0
	3H	44.5	45.9	44.9	46.2	46.5	44.8	46.2	45.2	46.5	46.8
	4H	45.1	46.4	45.5	46.7	47.0	46.1	47.3	46.5	47.7	48.0
	6H	45.1	46.2	45.5	46.6	47.0	47.1	48.2	47.5	48.6	48.9
	8H	45.1	46.1	45.5	46.5	46.9	47.5	48.5	47.9	48.9	49.3
	12H	45.0	46.0	45.5	46.4	46.8	47.8	48.7	48.2	49.1	49.5
8H	4H	45.5	46.6	45.9	46.9	47.3	46.4	47.5	46.9	47.9	48.2
	6H	45.6	46.5	46.0	46.9	47.3	47.7	48.5	48.1	48.9	49.4
	8H	45.6	46.3	46.0	46.8	47.2	48.2	49.0	48.6	49.4	49.8
	12H	45.6	46.2	46.0	46.7	47.1	48.6	49.3	49.1	49.7	50.2
12H	4H	45.6	46.6	46.0	46.9	47.4	46.4	47.4	46.9	47.8	48.2
	6H	45.8	46.5	46.2	47.0	47.4	47.7	48.5	48.2	48.9	49.4
	8H	45.8	46.4	46.2	46.9	47.4	48.3	48.9	48.8	49.4	49.9
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.4					

CIE Pub.117 Corrected 574.0 lm Total Lamp Luminous Flux. (8log(F/F0) = -1.9)

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:WLM  
 Test Date:2021-01-20

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.287  
 Humidity:65.0%  
 Test Distance:13.693m [K=1.0000]  
 Remarks:

## UTILIZATION FACTORS TABLE

Test:U:0V I:0A P:0W PF:0 Lamp Flux:573.957x1 lm		
NAME: NEMD2/W/1H/AT/LFP/WH	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2021012001
MFR.: JEWOO	SUR.:0.0001	PROTECTION ANGLE:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	49	36	28	49	36	28	47	35	28	21
0.80	59	46	37	58	45	37	56	44	37	29
1.00	68	55	46	66	54	46	64	56	45	37
1.25	75	63	54	74	62	54	71	60	53	44
1.50	81	69	61	79	68	60	76	66	59	50
2.00	89	79	71	87	78	70	83	75	69	60
2.50	94	85	77	92	83	77	88	81	75	65
3.00	98	90	83	96	88	82	92	85	80	71
4.00	103	97	91	101	95	90	96	91	87	77
5.00	106	101	96	104	99	94	99	95	91	82
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:WLM  
 Test Date:2021-01-20

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.287  
 Humidity:65.0%  
 Test Distance:13.693m [K=1.0000]  
 Remarks:

## ISOCANDELA DIAGRAM

Test:U:0V I:0A P:0W PF:0 Lamp Flux:573.957x1 lm		
NAME: NEMD2/W/1H/AT/LFP/WH	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2021012001
MFR.: JEWOO	SUR.:0.0001	PROTECTION ANGLE:

Conical surface Flux(90deg):

214.33 lm

%lum = 37.3%


%lamp = 37.3%

Conical surface Flux(120deg):

375.49 lm

%lum = 65.4%

%lamp = 65.4%

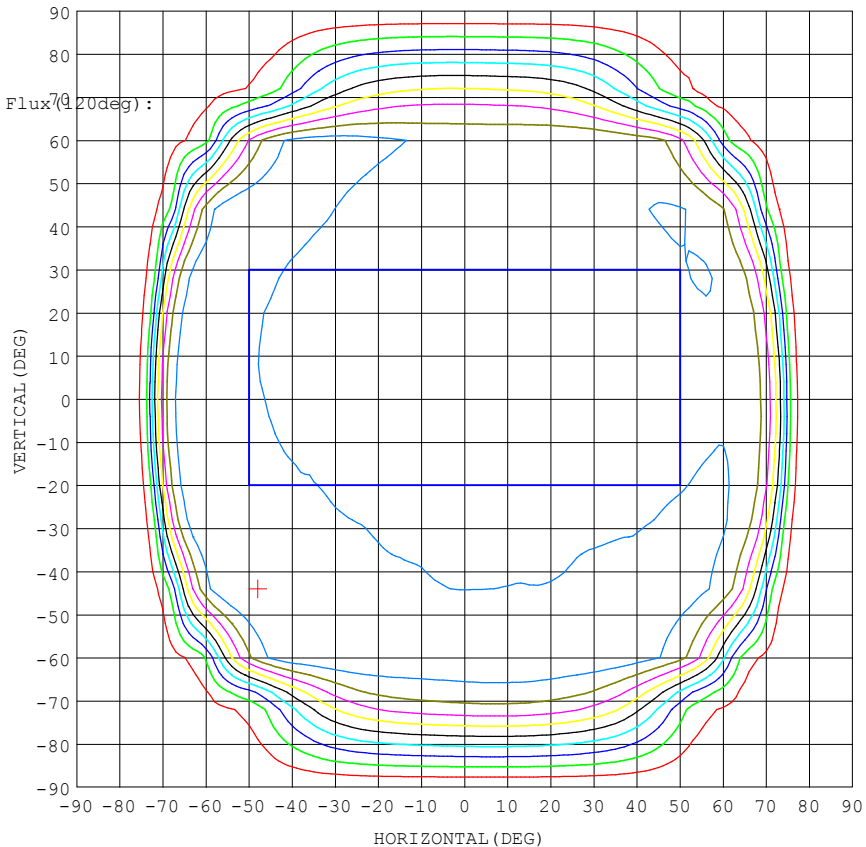

10% 13.62  
 20% 27.24  
 30% 40.86  
 40% 54.49  
 50% 68.11  
 60% 81.73  
 70% 95.35  
 80% 109.0  
 90% 122.6

MAX = 128.81  
 MIN = 110.20  
 AVG = 116.46  
 AVG/MAX = 0.90  
 MIN/MAX = 0.86

I<sub>max</sub>:136.2 (H-48.0,V-44.0)  
 (At:C=145.0, Gamma=59.5)


UNIT: cd

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:WLM  
 Test Date:2021-01-20

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.287  
 Humidity:65.0%  
 Test Distance:13.693m [K=1.0000]  
 Remarks:

## AAI Figure

Test:U:0V I:0A P:0W PF:0 Lamp Flux:573.957x1 lm		
NAME: NEMD2/W/1H/AT/LFP/WH	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2021012001
MFR.: JEWOO	SUR.:0.0001	PROTECTION ANGLE:

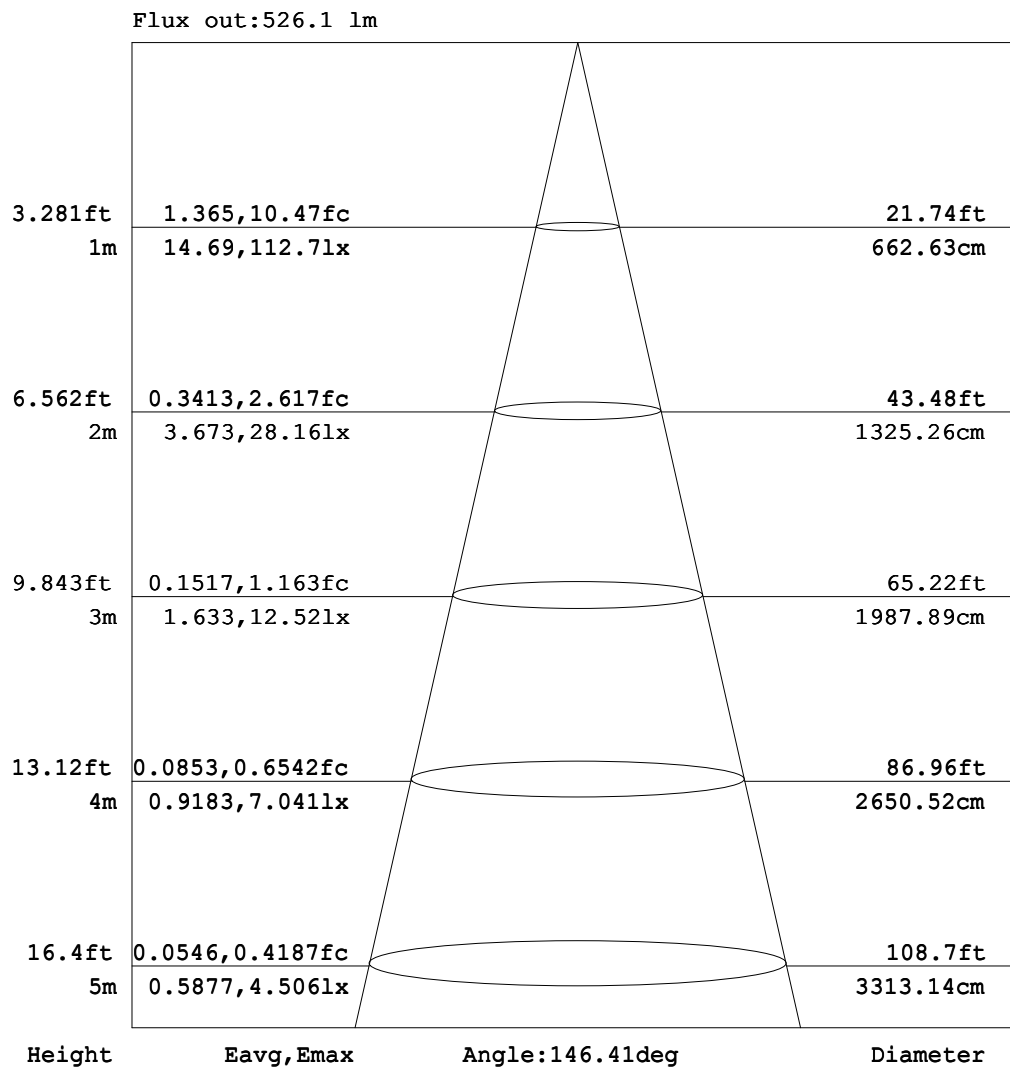

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: WLM  
 Test Date: 2021-01-20

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-2000H\_V1 SYSTEM V2.0.287  
 Humidity: 65.0%  
 Test Distance: 13.693m [K=1.0000]  
 Remarks:



## ISOLUX DIAGRAM


Test:U:0V I:0A P:0W PF:0 Lamp Flux:573.957x1 lm		
NAME: NEMD2/W/1H/AT/LFP/WH	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2021012001
MFR.: JEWOO	SUR.:0.0001	PROTECTION ANGLE:

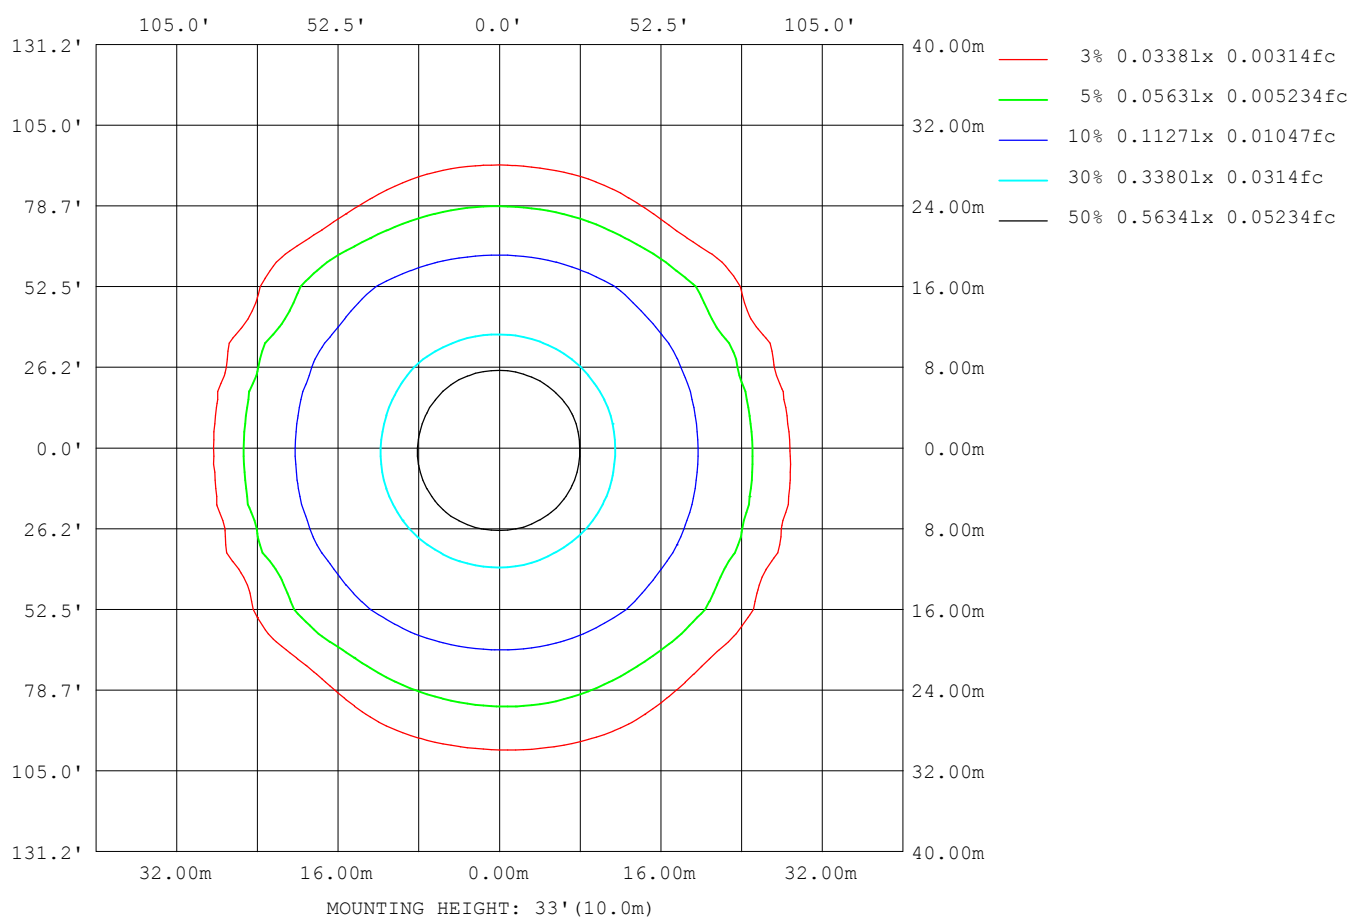

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:WLM  
 Test Date:2021-01-20

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000H\_V1 SYSTEM V2.0.287  
 Humidity:65.0%  
 Test Distance:13.693m [K=1.0000]  
 Remarks:

## Planar Illuminance Curve

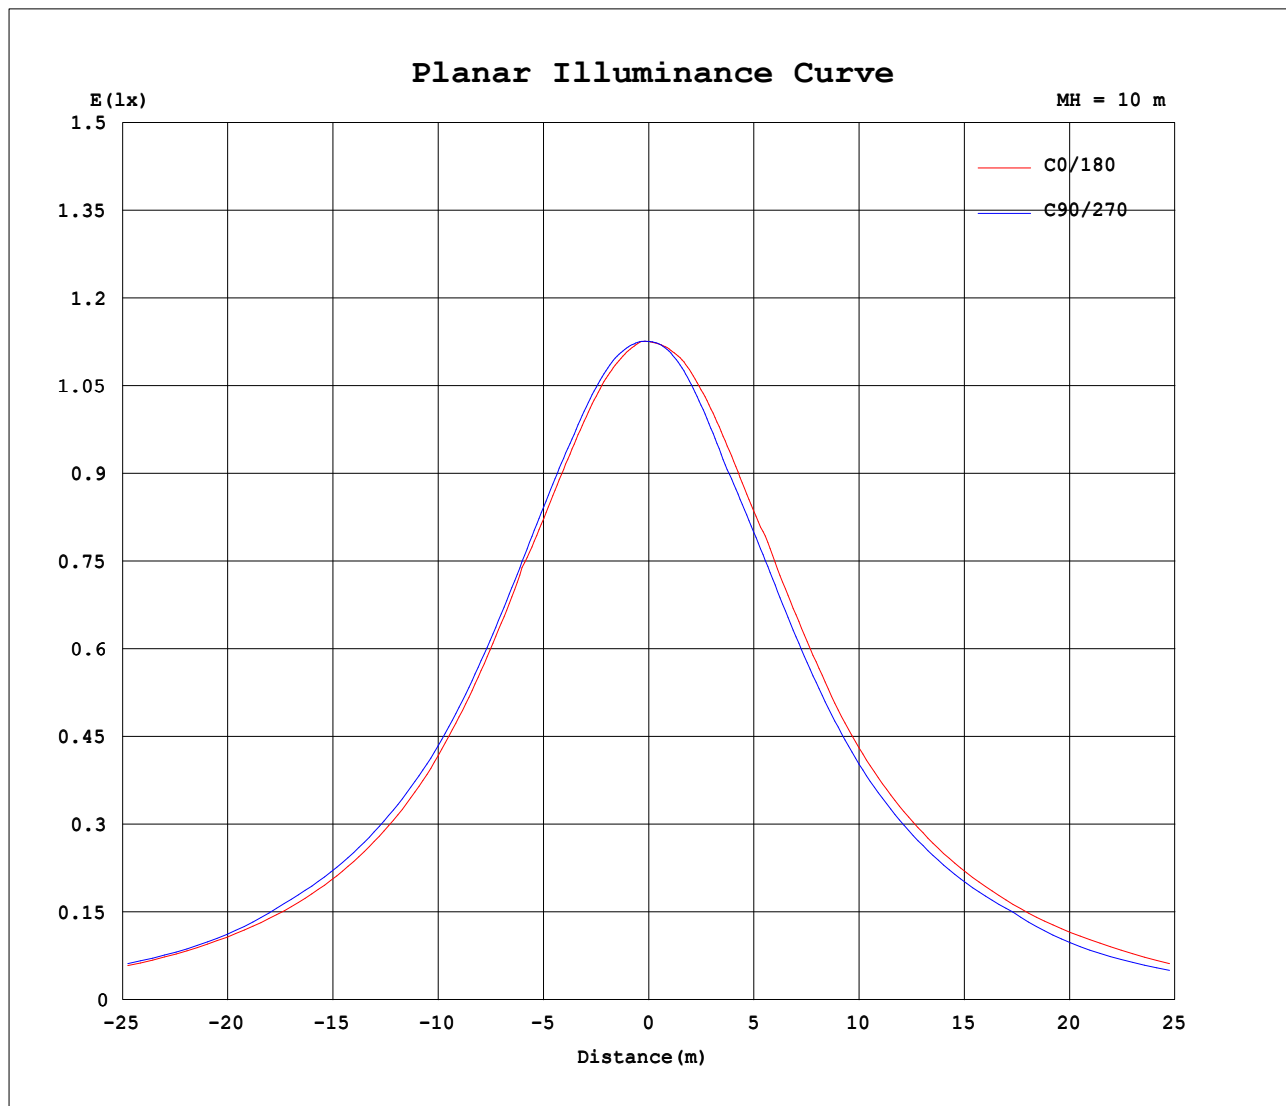

C Range: 0 - 360DEG  
C Interval: 5.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: WLM  
Test Date: 2021-01-20

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 0.5DEG  
Test System: EVERFINE GO-2000H\_V1 SYSTEM V2.0.287  
Humidity: 65.0%  
Test Distance: 13.693m [K=1.0000]  
Remarks:

UNIT: cd

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.287
Humidity:65.0%
Test Distance:13.693m [K=1.0000]
Remarks:

```

UNIT: cd

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.287
Humidity:65.0%
Test Distance:13.693m [K=1.0000]
Remarks:

```

UNIT: cd

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.287
Humidity:65.0%
Test Distance:13.693m [K=1.0000]
Remarks:

```

UNIT: cd

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.287
Humidity:65.0%
Test Distance:13.693m [K=1.0000]
Remarks:

```