

MIX 5.2

00119

DESCRIPTION

Mixer with 5 channels and 2 Independent Zones.

FEATURES

- 2 Independent Zones, each with balanced XLR-output (+unbalanced on cinch)
- Each zone has 3band tone controls, balance, volume and mono/stereo switch
- 11 inputs on 5 Channels (5 balanced mic + 4line + 2phono)
- 1Microphone with 3band tone control and zone assignable adjustable talkover.
- Every Channel can be assigned to zone A, zone B or both.
- Every Channel has individual peak and signal present leds.
- Gain levels and 45mm faders on all channels
- PFL with rotary selector, cue level adjustment and 6.3mm headphones jack.
- 2 independent record outputs without Channel1 microphone and free from talkover muting



www.jb-systems.eu | <https://www.facebook.com/JBS.Belgium/>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2015 by BEGLEC NV. All rights reserved.






SPECIFICATIONS

| | |
|--|---------------------------|
| General : Application | DJ & Club, Stage & Rental |
| General : Dimensions (cm) | 48.3 x 13.4 x 13 cm |
| General : Weight (kg) | 4.5 |
| General : Powerinput | AC 230V, 50Hz |
| General : Energy Label | No |
| General : Power consumption W | - |
| General : Color | black |
| General : Display | none |
| General : Fixation | 19" rack mountable |
| General : RU | 3U |
| Audio : min. frequency (Hz) | 20 |
| Audio : max. frequency (Hz) | 20000 |
| Audio : S/N ratio (> dB) | 85 |
| Audio : sensitivity (dB 1W/1m) | - |
| Audio : supported audio formats | - |
| Audio : supported audio media | - |
| Audio : max. output channels | 5 |
| Connections : input | - |
| Connections : output | - |
| Function : equalizer | No |
| Function : sound effects | No |
| Brand | JB SYSTEMS |
| EANCode | 5420025601191 |
| Discontinued | No |

Specifications

| | |
|------------------------|--------------------------------|
| Mic Input: | 1,5mV/10kOhm |
| Phono Input: | 3mV/47kOhm |
| Line Input: | 150 mV/22 kOhm |
| S/N Ratio: | >85 dB/1 kHz |
| Master A/B Output: | 1,5V/4 kOhm unbalanced |
| 850mV/600 Ohm balanced | |
| Frequency Response: | 20-20.000 Hz (±2dB) |
| Tone Control: | -12 dB, +12dB Phones 1V/32 Ohm |
| Dimensions (mm): | 134/H x 483/W x 130/D (19"/3U) |

YOUR DEALER

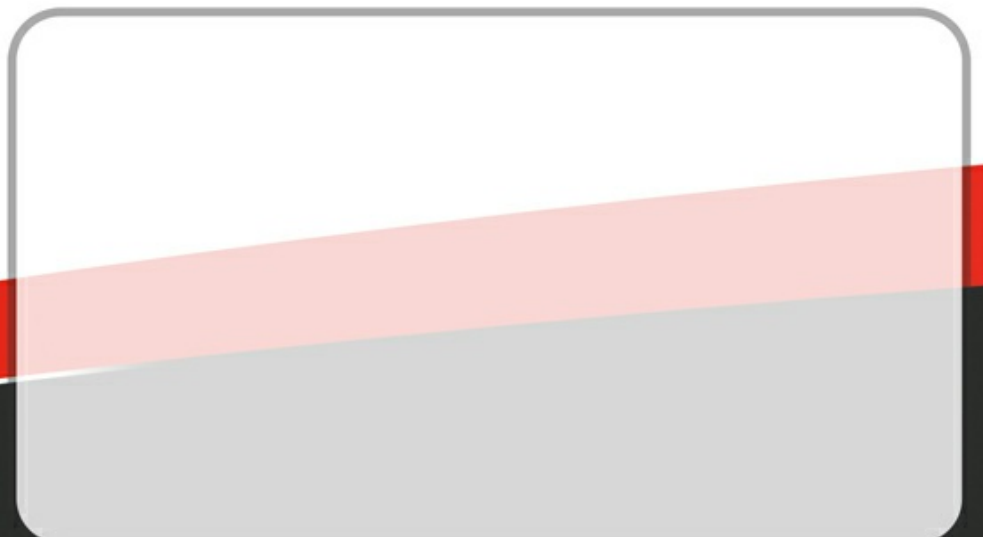

www.jb-systems.eu | <https://www.facebook.com/JBS.Belgium/>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2015 by BEGLEC NV. All rights reserved.

